


THE FUTURE IS ELECTRIC



PRODUCT CATALOGUE

ONLY THE SUN DOES IT BETTER...

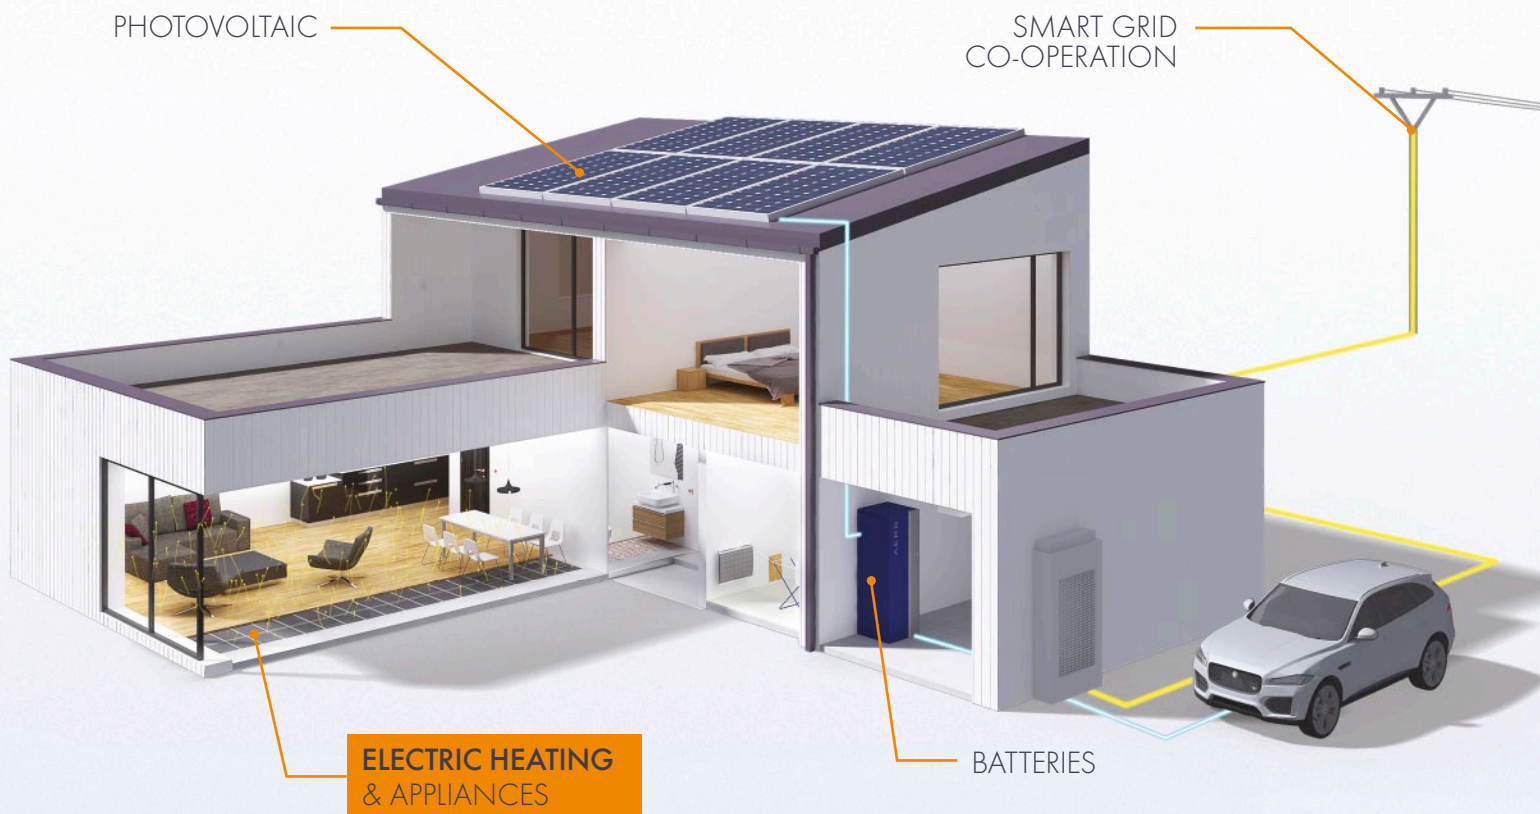


Fenix was founded in 1990 as one of the first private companies in the Czech Republic following the “Velvet” Revolution. The first items produced were the successfully marketed ECOSUN electric radiant heating panels, however, as market demand increased these products were followed by ECOFLEX electric convectors, ECOFLOOR heating cables and mats and ECOFILM heating films. The company also offers a wide range of supplementary products including heating system controls, cable kits and cable mats. With the increase in demand the structure of the company developed – for the reason of retaining maximum flexibility a holding company structure was chosen, with individual and independent members.

The following companies were incorporated successively: **Fenix s.r.o.** – plant producing electrical heating systems; **Fenix Trading s.r.o.** – trading company; **Fenix Slovakia s.r.o.** – production and trading company, representing FENIX in Slovakia; **Fenix Group a.s.** – a company which provides property management and services (strategic planning, administration of property, economic and financial services); **Flexel International Ltd.** – manufacturing and trading company located in the United Kingdom. In 2008 FENIX Holding acquired the production and trading company **Demista Ltd.** – manufacturer of special applications, such as mirror demisting heaters, vivarium heaters, caravan and mobile home heating equipment. At the end of 2009/in early 2010 Fenix Holding acquired two other production and trading companies: **ACSO SAS.** – production and trading company with its headquarters in France; **CEILHIT S.L.U.** – producer of heating cables and trading company with its headquarters in Spain, covering the market in Spain, Portugal and South America. **Konsulent Team A/S** – trading company with its headquarters in Norway has become the member of the



**SPECIALISTS
IN RADIANT HEATING**

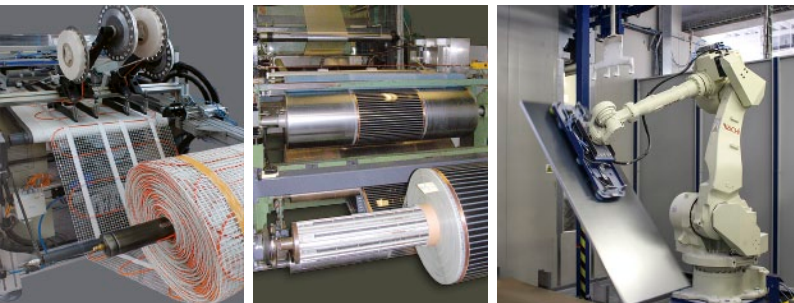

Fenix Group a.s. from January 2014. **Fenix Deutschland GmbH** – The company, which was founded in 2003 under the name Limmer Heizelemente, became a member of the Fenix Group a.s. holding company in 2018. It has a high-capacity warehouse and a sales team that sells the entire range of FENIX brand products across the German market. **Fenix Polska Sp. z o.o.** – new member of the Fenix Group since February 2019 – Trading company with its headquarters in Poland. **ELMARK d.o.o.** – a trading company based in Serbia. Founded in 1993, the company is the most important seller of electric heating systems in Serbia. It became a member of the group in 2021. Presently, the company **Fenix Holding s.r.o.** is one of the largest European producers of surface electric heating systems, and currently exports to 70+ countries worldwide. **AERS s.r.o.** (2016) – A Technology Company engaged in designing, production and installation of SAS battery-powered peak stations and AES 10–50kWh home modular battery storage.

ECOSUN – radiant heating panels
low temperature radiant heating panels
pages 4–10
high temperature radiant heating panels
page 11
Terrace Heaters, Radiant heaters for church pews
page 12

ECOFLOOR – heating cable systems
heating cable circuits and cable mats, complete floor heating installation kits, deicing gutter and eaves trough de-icing, snow melting, de-icing of outdoor surfaces, frost protection of pipes
pages 14–28

ECOFILM – heating film systems
E-set – *underfloor heating, kit for DIY installation*
F – *underfloor heating films*
C – *radiant ceiling heating films*
MODULE – *ceiling heating system*
MHF – *mirror fogging prevention*
pages 30–33

ULTRATHERM – heating for vivariums and terrariums
pages 34–35

ECOFLEX – electric convectors
classic convection heaters
pages 36–37

THERMOSTATS AND CONTROLS
regulation units, control units, room and floor sensors, and regulators for reduction of main circuit breaker value
pages 38–41

SUPPLEMENTARY PRODUCTS
hand dryers, tubular heating elements
page 42

Principle of infrared heating

Whereas in **convection heating** the air is warmed by a convector which then transfers heat as it flows over the objects that are to be heated (walls, furniture), **radiant heating** panels transfer heat mainly through radiant energy. Upon encountering objects (walls, furniture, floors), radiant energy is partially reflected (approx. 15%) while the majority (approx. 85%) is absorbed by the objects. This radiant energy is converted to heating energy as it raises the temperature of the objects, which then transfer heat to the cooler air by convection. Thanks to unique Silicating technology, high temperature radiant panels reach a high emissivity of up to 0.98 μ .


Fenix utilises unique state-of-the-art technology in respect of the finished panel surfaces. Thermocrystal for low temperature panels and Silicating for high temperature panels.




ECOSUN U

The principles mentioned create the following advantages:


- ➔ the surface of the radiant panel generates a heat flow whose spectrum is in the wavelength greater than 5 micrometers and is thus absorbed to a large degree by the human body: people are therefore heated in a manner similar to the objects in the room.
- ➔ when the radiant heat flow increases the temperature of the objects in the room to 20–22 °C, comfort conditions are achieved even with air temperatures of 18–19 °C which can lead to energy savings of 18–24%.
- ➔ radiant panels permit the temperature distribution in a room to be more vertically balanced giving a 1–2 degree difference between the floor and the ceiling (for convection heating the difference is given as 1 °C per metre of height, 30–50 cm of height).
- ➔ there is lower circulation of dust therefore dust particles due to Brownian motion, thus reducing the risk of illnesses – asthma, mucous membrane infection, etc.
- ➔ increased wall temperatures mean a lower possibility of surface condensation, although the humidity in the room is not lowered.
- ➔ glass is not “transparent” (we might say “transthermant”) when it comes to radiation with wavelengths over 3 and thus the radiant flow is not lost through windowpanes.
- ➔ the panels do not require maintenance

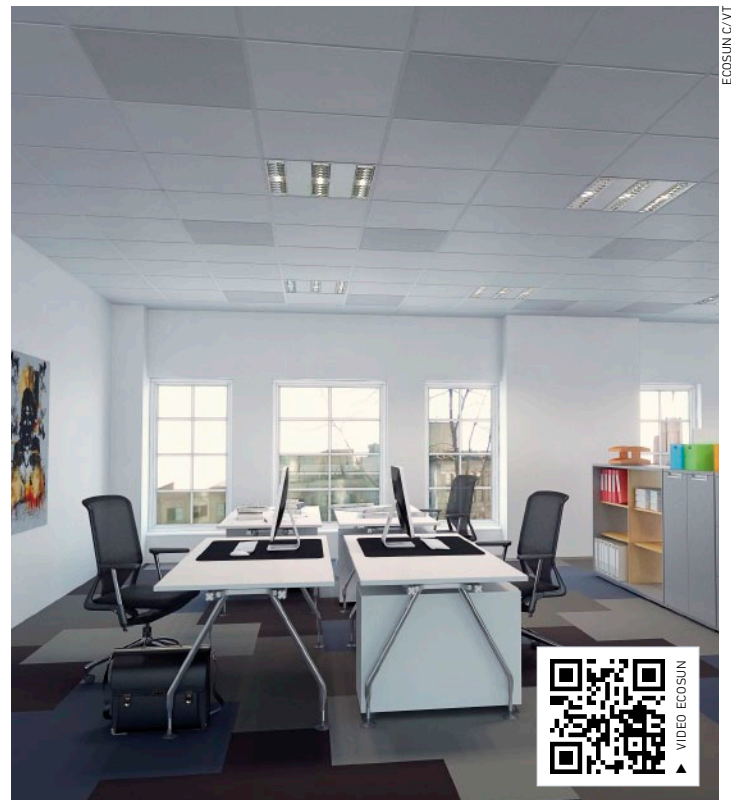

ECOSUN C/V T

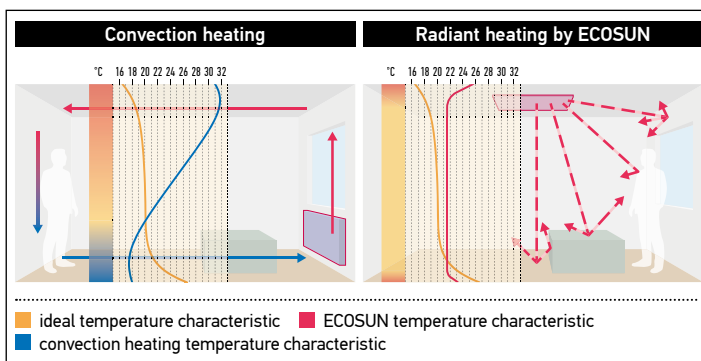

↓ SURFACE TREATMENT OF LOW TEMPERATURE PANELS

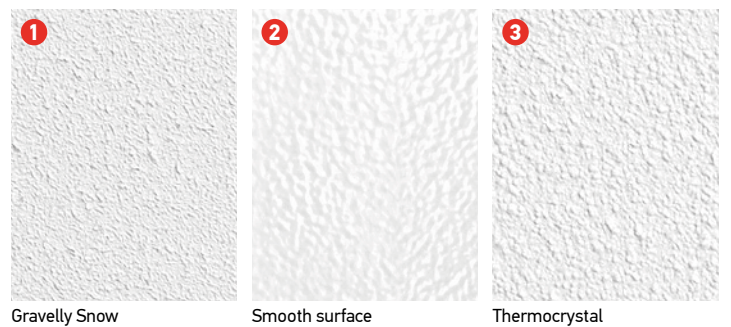

LOW TEMPERATURE RADIANT PANELS

► **ECOSUN U, U+** – universal panel for living and non-living spaces, possibly mounted onto ceilings or into suspended ceilings.

TYPE	[W]	[V]	↓	Rating	Dimensions [mm]	Weight netto [kg]	Recommended clearance	Qty on pallet	Cat. No.	
									U	U+
ECOSUN 300 U / U+	300	230	1	IP 44	592×592×30	5.0	from 2.5 m	40	5401037	5401161
ECOSUN 600 U / U+	600				1192×592×30	9.4	from 2.5 m	20	5401047	5401162
ECOSUN 700 U / U+	700				1192×592×30	9.4	from 2.7 m	20	5401171	5401163
ECOSUN 850 U+	850				1192×800×30	12.6	from 3 m	15	–	5401174

Accessories: aluminium frame; flush mount frame; cable suspension system – see page 10

■ **Type U+** for ceiling and wall installation, fitted with a thermal fuse. **Bolts and ceiling fixing frame** are included in the packing.

■ **Class I;** **Basic colour:** white (RAL 9016); Other colours are available to order for an additional fee; **Connection cable:** 1 m

► **ECOSUN BASIC** – “smooth” versions of ECOSUN U+ panels. The Basic panel type doesn't have the Thermocrystal surface finish, only a resistant white powder plastic coating with an orange peel structure. The absence of the Thermocrystal surface finish results in a partial decrease in the radiant component in favour of convection heat transfer. However, the smooth surface is considerably easier to maintain and clean. ECOSUN Basic is therefore particularly suitable for health care institutions or for users with asthma problems or allergies.

TYPE	[W]	[V]	↓	Rating	Dimensions [mm]	Weight netto [kg]	Recommended clearance	Qty on pallet	Cat. No.
ECOSUN 300 BASIC	300	230	2	IP 44	592×592×30	5.0	from 2.5 m	40	5401154
ECOSUN 600 BASIC	600				1192×592×30	9.4	from 2.5 m	20	5401156
ECOSUN 850 BASIC	850				1192×800×30	12.6	from 3 m	15	5401158

Accessories: aluminium frame; flush mount frame; cable suspension system – see page 10

■ The panel is fitted with a supply lead for connection to a wiring box. **Bolts and ceiling fixing frame** are included in the packing. Thanks to a thermal fuse, the panel is also suitable for wall and ceiling installation.

■ **Class I;** **Basic colour:** white (RAL 9010); Other colours are available to order for an additional fee; **Connection cable:** 1 m

► **ECOSUN C/VT** – heating panels only for mounting into suspended ceilings.

TYPE	[W]	[V]	↓	Rating	Dimensions [mm]	Weight netto [kg]	Recommended clearance	Qty on pallet	Cat. No.
ECOSUN 300 c 600/VT	300	230	1	IP 20	574×574×35	5.1	min. 2.5 m	40	5401065
ECOSUN 600 c 600/VT	600				574×1174×35	10.2	min. 2.5 m	20	5401075

■ **Class I;** **Basic colour:** white (RAL 9016); Other colours are available to order for an additional fee

► **ECOSUN K+** – heating panel used for warming church pews, desks in offices and administrative buildings. They can be hung on a wall in the standard way.

TYPE	[W]	[V]	↓	Rating	Dimensions [mm]	Weight netto [kg]	Recommended installation	Qty on pallet	Cat. No.	
									BROWN	WHITE
ECOSUN 100 K+	100	230	3	IP 44	500×320×30	2.1	vertical or horizontal position	45	5401200	5401202
ECOSUN 200 K+	200				750×320×30	3.1		45	5401205	5401207
ECOSUN 270 K+	270				1000×320×30	3.9		30	5401210	5401212
ECOSUN 330 K+	330				1250×320×30	5.4		30	5401215	5401217
ECOSUN 400 K+	400				1500×320×30	6.4		30	5401220	5401222

Accessories: cable suspension system – see page 10

■ **Class I;** **Basic colour:** brown (RAL 8016) thermocrystal surface, white (RAL 9016) gravelly snow surface; Other colours are available to order for an additional fee; **Connection cable:** 0.75 m for 100–270 K+, 1.2 m for 330–400K+; **Bolts and ceiling fixing frame** are included in the packing.

► **ECOSUN IKP, IN, IN-2** – panels for industrial and agricultural applications (i.e. in workshops, greenhouses, livestock facilities); for installation on the ceiling it is necessary to order a ceiling frame.


TYPE	[W]	[V]	↓	Rating	Dimensions [mm]	Weight netto [kg]	Recommended clearance	Qty on pallet	Cat. No.							
									BROWN	WHITE						
ECOSUN 750 IKP	750	230	2	IP 54	1192×592×30	8.8	2.5–3.0	20	—	5401177						
ECOSUN 700 IN	700								3	IP 66	1192×592×30	8.7	2.8–3.3	20	5401181	5401180
ECOSUN 700 IN-2	700								3	IP 66, E Ex 2	1192×592×30	8.7	3.0–3.5	20	5401186	5401185

Accessories: cable suspension system; ceiling fixing frame; supports – see page 10

■ **Class I;** **Colour:** brown (RAL 8016), white (RAL 9016) / IKP 750 W only white (RAL 9010) smooth version; **Connection cable:** 1 m

↓ Surface treatment, see page 4

► **ECOSUN G** – a glass radiant panel derived from GR panels. Slim profile – just 20 mm (panel with frame). The panel is supplemented with thermal insulation, with a frame from eloxed aluminium and versatile fixtures which enable installation both on a wall (vertically) and on the ceiling (horizontally).




TYPE	[W]	[V]	Rating	Dimensions * [mm]	Weight netto [kg]	Recommended installation	Qty on pallet	Cat. No.
ECOSUN G 300 white	300	230	IP 44	600×600×30	7.3	for ceiling min. 2.5 m, or on the wall	30	5437110
ECOSUN G 600 white	600			1200×600×30	13.6		15	5437112
ECOSUN G 850 white	850			1200×800×30	16.5		15	5437114
ECOSUN G 300 black	300			600×600×30	7.3		30	5437116
ECOSUN G 600 black	600			1200×600×30	13.6		15	5437118
ECOSUN G 850 black	850			1200×800×30	16.5		15	5437120
ECOSUN G 300 mirror	300			600×600×40	9.8		30	5437126
ECOSUN G 600 mirror	600			1200×600×40	18.9		15	5437128

WHILE STOCKS LAST

Accessories: cable suspension system; spacing set; ceiling fixing frame – see page 10

► Option of installing on a class C or D flammable base; **Class II**; **Connection cable**: length of supply cables 2 m with plug connection.

► **ECOSUN G / with printed surfaces** – it is rather an innovation applied to our current ECOSUN G glass panels.



TYPE	[W]	[V]	Rating	Dimensions * [mm]	Weight netto [kg]	Recommended installation	Qty on pallet	Cat. No.
ECOSUN G 300 with print	300	230	IP 44	600×600×30	7.3	for ceiling min. 2.5 m, or on the wall	30	5437471
ECOSUN G 600 with print	600			1200×600×30	13.6		15	5437473

WHILE STOCKS LAST

Accessories: cable suspension system; spacing set; ceiling fixing frame – see page 10


► Option of installing on a class C or D flammable base; **Class II**; **Connection cable**: length of supply cables 2 m with plug connection.



→ See our web Gallery.



► **ECOSUN E** – an alternative version of the ECOSUN G glass radiant panel. For this panel, the front glass has been substituted by a panel with a plastic powder coating; is suitable e.g. for health care applications.




TYPE	[W]	[V]	Rating	Dimensions * [mm]	Weight netto [kg]	Recommended installation	Qty on pallet	Cat. No.
ECOSUN E 300 white	300	230	IP 44	600×600×30	5.9	for ceiling min. 2.5 m, or on the wall	30	5437140
ECOSUN E 600 white	600			1200×600×30	10		15	5437142
ECOSUN E 850 white	850			1200×800×30	9.55		15	5437145

WHILE STOCKS LAST

Accessories: cable suspension system; ceiling fixing frame – see page 10

► Option of installing on a class C or D flammable base; **Class II**; **Connection cable**: length of supply cables 2 m with plug connection.

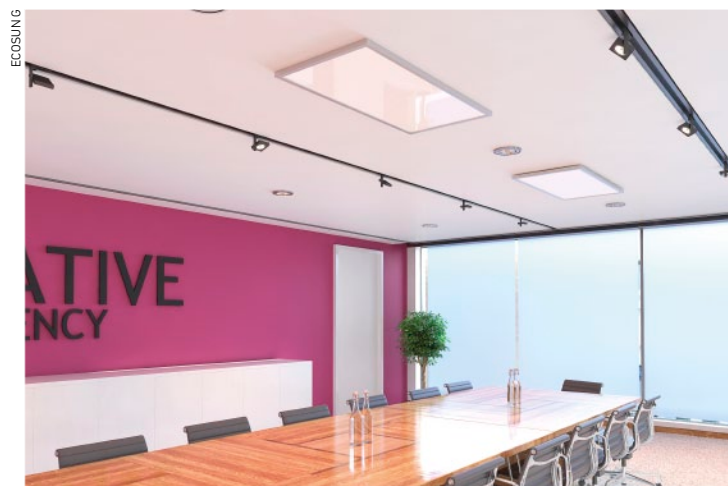

* Thickness includes mounting fixture, which is an inseparable part of the panel.

► **ECOSUN GS** – a glass radiant panels, which combine the elegant design of frameless GR panels and the versatility of ECOSUN panels – the brackets enable the installation of the GS panel on the wall (vertically) and on the ceiling (horizontally). In rooms with limited space such as the bathroom is adapted the type of ECOSUN GS 500, which with its dimensions fits to vertical installation. The panel is fitted with a thermal fuse.

TYPE	[W]	[V]	Rating	Dimensions * [mm]	Weight netto [kg]	Qty on pallet	Cat. No.					
							WHITE	BLACK	BASALT	PLATINUM GRAY	GRAPHITE	WINE RED
ECOSUN GS 300	300	230	IP 44	585×585×40	9.7	30	5437148	5437154	5437186	5437187	5437188	5437185
ECOSUN GS 500	500			1200×400×40	14.05	15	5437180	5437182	5437179	5437181	5437183	5437178
ECOSUN GS 600	600			1185×585×40	17.6	15	5437150	5437156	5437196	5437197	5437198	5437195
ECOSUN GS 850	850			1185×785×40	21.85	15	5437152	5437158	–	–	–	–
							MIRROR					
ECOSUN GS 300 mirror	300	230	IP 44	585×585×41	11.55	30	5437160					
ECOSUN GS 500 mirror	500			1200×400×41	16.5	15	5437184					
ECOSUN GS 600 mirror	600			1185×585×41	21.15	15	5437162					

Accessories: cable suspension system; spacing set; supports; towel rail – see page 10

- **Recommended installation:** for ceiling min. 2.5 m (GS 300, GS 500, GS 600); for ceiling min. 3 m (GS 850); or on the wall
- **Class II; Connection cable:** length of supply cables 1.9 m with plug connection; **Bolts and ceiling fixing frame** are included in the packing.




► **ECOSUN GS / with printed surfaces** – it is rather an innovation applied to our current ECOSUN GS glass panels.

TYPE	[W]	[V]	Rating	Dimensions * [mm]	Weight netto [kg]	Recommended installation	Qty on pallet	Cat. No.
ECOSUN GS 300 with print	300	230	IP 44	585×585×40	9.7	for ceiling min. 2.5 m, or on the wall	30	5437494
ECOSUN GS 600 with print	600			1185×585×40	17.6		15	5437496

Accessories: cable suspension system; spacing set; supports; towel rail – see page 10

- **Class II; Connection cable:** length of supply cables 1.9 m with plug connection; **Bolts and ceiling fixing frame** are included in the packing.

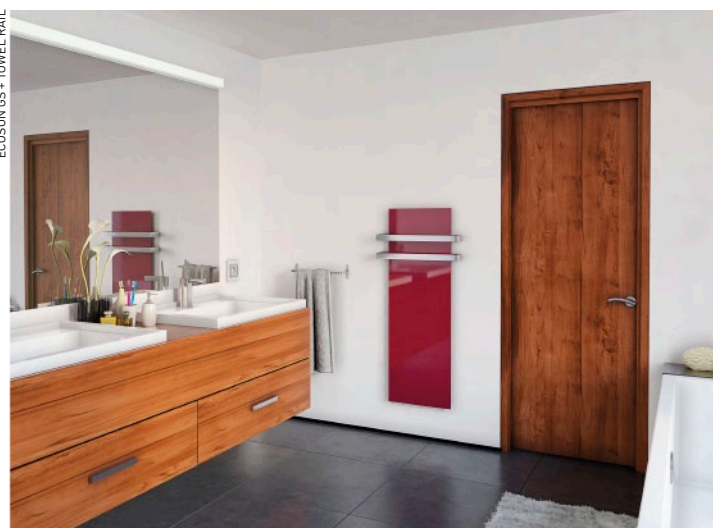

* Thickness includes mounting fixture, which is an inseparable part of the panel.

GR – GLASS RADIANT PANELS

GR glass radiant panels **feature an attractive and timeless design**. Due to their aesthetic appearance these panels are primarily intended for heating reception rooms, offices and other rooms. These glass panels consist of a 12 mm toughened glass plate heating element, a thermo fuse, a connection cable. They are designed to be mounted on a wall and connected to a wiring box by the connection cable.



VIDEO: GR



GR/GR+ PANEL

► **GR PANELS** – glass panels (thermo fuse). The panels are manufactured in 4 series with different outputs. GR panels are available in five colours: mirror, white, black, red, yellow-green.

► **GR+ PANELS** – The GR+ panel is a standard GR glass panel but it has an integrated Watts wireless receiver. This means that a **Watts V22 wireless thermostat has to be purchased** in order to operate the panel. However, one shared V22 thermostat is sufficient to control up to 4 panels in one room, which is why it should be ordered independently. Wall brackets are included with the product, but **fasteners** (wall anchors, screws) are not, as they need to be chosen according to the type of installation.

TYPE	[W]	Qty on pallet / in crate	Dimensions [mm]		Weight netto [kg]		Cat. No.				
			COLOR (MIRROR)	COLOR	MIRROR	WHITE	YELLOW-GREEN	RED	BLACK	MIRROR	
GR 300	300	10 / 22	700×500 × 12 (8)	14	10.6	5437602	5437603	5437604	5437605	5437601	
GR 500	500	5 / 11	900×600 × 12 (8)	22.8	16.4	5437612	5437613	5437614	5437615	5437611	
GR 700	700	5 / 12	1100×600 × 12 (8)	26.9	21.2	5437622	5437623	5437624	5437625	5437621	
GR 900	900	5 / 8	1200×800 × 12 (8)	37.3	27.7	5437632	5437633	5437634	5437635	5437631	
GR+ 300	300	10 / 22	700×500 × 12 (8)	15	11	5437707	5437708	5437709	5437710	5437706	
GR+ 500	500	5 / 11	900×600 × 12 (8)	23.3	16.8	5437717	5437718	5437719	5437720	5437716	
GR+ 700	700	5 / 12	1100×600 × 12 (8)	27.4	21.6	5437727	5437728	5437729	5437730	5437726	
GR+ 900	900	5 / 8	1200×800 × 12 (8)	39.3	28.3	5437737	5437738	5437739	5437740	5437736	

Accessories: supports; towel rail – see page 10

■ 230 V; Rating IP 44; Class II; Connection cable: 1 m; Needed clearance: lower edge 5 cm / top and side edge 15 cm / front side 50 cm



White



Black



Yellow-green



Red




Mirror



GR+ PANEL (BACK SIDE)




GR/GR+ PANEL + SUPPORTS

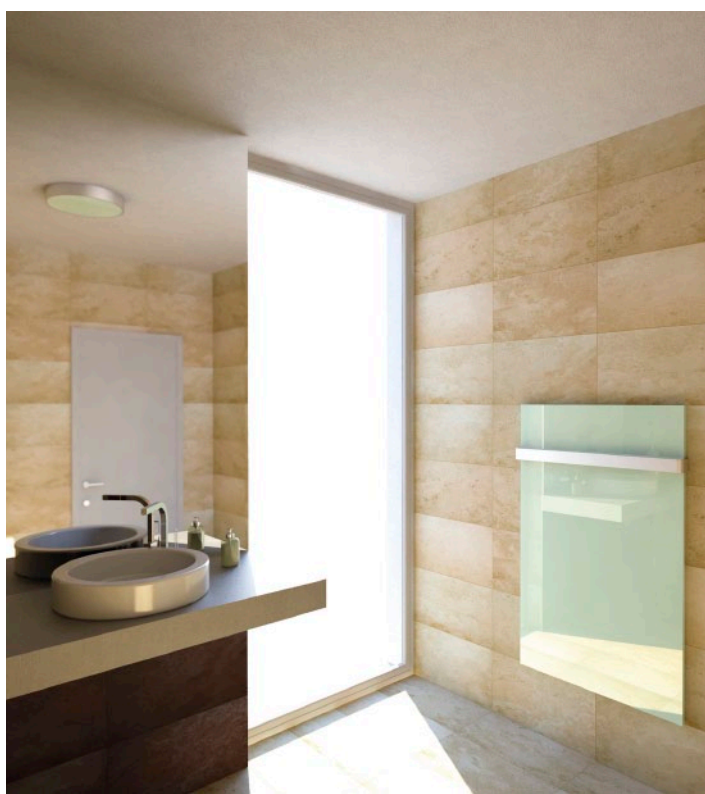

GR/GR+ PANEL WITH+ TOWEL RAIL

ECOSUN CR

Decorative radiant panels from sintered ceramic material will add a rustic mood to your space. Trendy textures **perfectly imitating concrete, beton and natural rocks** suit literally each and every place – houses, hotels, offices, restaurants. Panels can be fitted with optional towel rails, meaning they can become functional accessory in the bathroom. Due to the side bar, any number of rails can be added to the panel, so you can adjust it based on your taste, needs and preferences. For demanding clients we also offer side cover bars to conceal the rear side of the panel. Panels are designed in 4 different colours, 4 sizes and are intended to be placed on the wall vertically or horizontally.

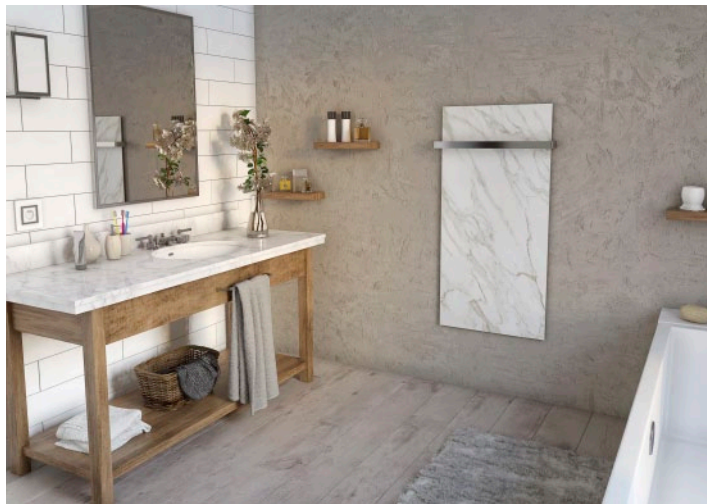

► ECOSUN CR – radiant panels from sintered ceramic material.

TYPE	[W]	[V]	Rating	Dimensions [mm]	Weight netto [kg]	Qty on pallet	Cat. No.			
							BASALT BLACK	CALACATTA	BETON	CONCRETE TAUPE
ECOSUN 300 CR	300	230	IP 44	592×592×40	11.5	10	5430500	5430508	5430516	5430524
ECOSUN 500 CR	500			1192×400×40	16.2	5	5430502	5430510	5430518	5430526
ECOSUN 700 CR	700			1192×592×40	21.9	5	5430504	5430512	5430520	5430528
ECOSUN 1050 CR	1050			1500×700×40	32.5	5	5430506	5430514	5430522	–

Accessories: towel rail, side cover bars – see page 10


■ Class II; **Connection cable:** 1.9 m; **Needed clearance:** lower edge 5 cm / top and side edge 5 cm / front side 50 cm; **Bolts and ceiling fixing frame** are included in the packing.




Basalt black



Calacatta



Beton



Concrete Taupe




side bar for the attachment of a towel rail

ECOSUN NATURAL


These ceramic radiant panels, which **perfectly imitate the look of natural stone**, are suitable for formal rooms, halls and bathrooms, as well as standard living rooms. The panels can be hung both length-wise and width-wise, but always only in a vertical position. The radiant panels are offered in 5 colour variants: as they imitate the look of natural stone, there can be deviations in the colour and structure of the material.




► ECOSUN NATURAL – ceramic radiant panels.




Coal



Beige



Rosso



Cream



Marrone

TYPE		Cat. No.
ECOSUN 400 N – Coal	400 W; 230 V; IP 44	5437130
ECOSUN 400 N – Cream	1.9 m cold lead with plug	5437131
ECOSUN 400 N – Rosso	Dimensions: 450×900×45 mm	5437132
ECOSUN 400 N – Beige	Weight netto: 14.8 kg	5437133
ECOSUN 400 N – Marrone	Quantity on pallette: 10 pcs	5437134

Accessories: towel rail – see page 10

■ Class II; **Connection cable:** 1.9 m; **Needed clearance:** lower edge 5 cm / top and side edge 15 cm / front side 50 cm; **Bolts and ceiling fixing frame** are included in the packing.

ACCESSORIES FOR LOW TEMPERATURE PANELS

► **PANEL SIDE COVER BARS** – are used to conceal the attachment of the panel to the wall. Never cover the top and bottom part of the panel! This would limit the flow of air and cause the panel to overheat.

FOR	Cat. No.	FOR	Cat. No.
N 400	5437882	GS/CR 500	5437888
GS/CR 300	5437884	GS/CR 600-700	5437886

► **ALUMINIUM FRAME** – is intended for ECOSUN panels and has a purely aesthetic function. The body of an ECOSUN panel is composed of two parts riveted together. Neither the gap formed by the connection of the front and rear parts nor the riveting itself are usually particularly visible in the case of ceiling installation. However, if required the panel can be fitted with this aluminium frame, which covers the join.

FOR	Cat. No.
300 U/U+	5401228
600/700 U/U+	5401229

► **STAINLESS STEEL TOWEL RAIL** – these towel rails are designed as an accessory for GR/GS/NATURAL radiant panels. Mostly used as an accessories for bathrooms. After the installation of this rail, the standard panel is transformed into a smart bathroom heater with a rail on which a towel or bath towel can be hung. They are made from a 4x30 mm polished stainless steel sheet. The rail is intended only for panels installed vertically; however, the installation itself is very easy.

FOR	Cat. No.		FOR	Cat. No.	
	SINGLE	DOUBLE		SINGLE	DOUBLE
GR 300	5437810	5437820	N 400	5437862	–
GR 500 and 700	5437812	5437822	GS/CR 500	5437864	–
GR 900	5437818	5437824	GS/CR 300-600-700	5437866	–

► **CABLE SUSPENSION SYSTEM** – for low-temperature panels

FOR	Cat. No.
U, U+, K+, IKP, IN, G, E, GS	5401223

► **SPACING SET** – to install ECOSUN GS/G/E on a ceiling made of plasterboard/fiberboard.

FOR	Cat. No.
GS/G/E	5401227

► **SUPPORTS FOR PANELS** – for applications where panels cannot be hung on a wall (e.g. in the case of glass surfaces), it is possible to use a set of supports for the placement of the panel on the floor. The panel is stable on the supports; however, we recommend that the supports be attached to the floor in the case of permanent installation. The supports are intended for horizontal panel installation. Excessive pressure must not be applied to a panel that is standing on supports – if they are not attached to the floor, the panel may tip over, and if they are attached to the floor, there is a risk of damage to the panel glass (GR, GS) at the points of attachment to the supports.

TYPE	Cat. No.
Supports for GR panels Contents of the set: GR panel supports (2 pcs); plastic GR panel bracket covers (2 pcs) Dimensions: diameter of the base 130 mm, height of the support 185/105 mm (the bottom edge of the panel is 50 mm above the floor), spacing of attachment openings in the base 85 mm, surface finish CHROMO metallic powder coating (silver)	8000101
Supports for GS, U+, Basic, K+, IKP, IN panels	5401193

► **FLUSH MOUNT FRAME** – enables the installation of ECOSUN U into plasterboard and plaster fibreboard suspended ceilings in such a way that the panels are on the same level as the ceiling. The frame solves not only the visual aspect of the ends of the edges of the suspended ceiling, but also the necessary distance between the panel and the ceiling structure. **Basic colour:** white (RAL 9016)

FOR	Cat. No.
300 U/U+/BASIC	5401224
600/700 U/U+/BASIC	5401225
850 U+/BASIC	5401226

► **CEILING FIXING FRAME** – are not included with the product in the case of IKP, IN, IN-2, G and E panels. The relevant ceiling frame must be purchased separately if attachment to the ceiling is desired.

FOR	Cat. No.
700 IN, IN-2	5401190
IKP	5401191
E/G 300	5401195
E/G 600/850	5401199




Panel side cover bars



Aluminium frame



Stainless steel towel rail

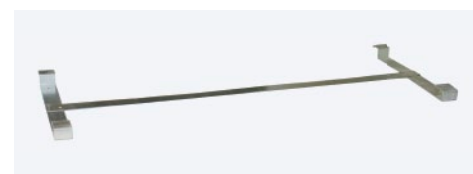

Ceiling fixing frame




Flush mount frame



Spacing set



Cable suspension system



Supports for GR panels



Supports for GS, U+, Basic, K+, IKP, IN

NOTIFICATION

ECOSUN, MR and GR radiant panels are only equipped with a limiting thermostat – suitable regulation is essential for correct and economical operation; see the chapter **THERMOSTATS AND CONTROLS**. In the case of GR glass panels, the limiting thermostat switches off the panels at an average temperature of 90 °C, and therefore the real thermal output of the panels is approximately 10 % lower than the wattage. For this reason and also for the improvement of the dynamics of the whole heating system, we recommend that the installed wattage is increased by 20 % in contrast with the result of the heat loss calculation. GR panels can be supplemented with chromium-coated supports which enable the panel to be placed on the floor – e.g. in proximity to glass surfaces or to create a stylish portable heater.

HIGH TEMPERATURE RADIANT PANELS



► **ECOSUN S+ / S+Anticor** – for industrial halls, gyms, halls, workshops, with a rating that corresponds to the given environment. Suitable for drying of buildings. For spaces with higher humidity – agricultural structures, washing facilities, panels are produced in a corrosion-proof version S+Anticor.

TYPE	[W]	[V]	Weight netto [kg]	Qty on pallet	Recommended clearance	Dimensions [mm]	Cat. No.	
							S+	S+ Anticor
ECOSUN S+ 06 short	600	230	4	68	According to individual conditions, for full area 5–8 m, zonal 3.4–4.5 m	650×250×60	5401537	–
ECOSUN S+ 08 short	850						5401538	–
ECOSUN S+ 09 / Anticor	900		7.8	58		1550×150×60	5401540	5401552
ECOSUN S+ 12 / Anticor	1200	5401542					5401554	
ECOSUN S+ 18 / Anticor	1800	230 / 400 2N	12.2	39		1550×250×60	5401544	5401556
ECOSUN S+ 24 / Anticor	2400						5401546	5401558
ECOSUN S+ 30 / Anticor	3000	230 / 400 3N	17	26	1550×350×60	5401548	5401560	
ECOSUN S+ 36 / Anticor	3600					5401550	5401562	
Corrective varnish for the lamellas of ECOSUN high-temperature panels							2451213	

■ **Class I; Rating IP 44; Basic colour:** S+ (white – RAL 9002) / S+Anticor (RAL 9002).

ACCESSORIES FOR HIGH TEMPERATURE PANELS

► **TILTABLE BRACKET** – this tiltable bracket enables the installation of ECOSUN S+/Anticor panels at an angle, and thus the aiming of the heat flow at the required area. The bracket can be used for ceiling as well as wall installation; the package contains 1 pair of brackets (two pieces).

TILTABLE BRACKET	Cat. No.
FOR ECOSUN S+	5401785
FOR ECOSUN S+ ANTICOR	5401787

► **FLUSH MOUNT FRAME** – the flush mount frame enables the installation of ECOSUN S+ into plasterboard and plaster fibreboard suspended ceilings in such a way that the heating lamellas are on the same level as the ceiling. The frame solves not only the visual aspect of the ends of the edges of the suspended ceiling, but also the necessary distance between the panel and the ceiling structure.

FLUSH MOUNT FRAME	Cat. No.
FOR ECOSUN S+ 18 / S+ 24 (RAL 9002)	5401802


► **PROTECTIVE GRILLE** – the protective grille protects the lamellas of ECOSUN S+ high-temperature panels against mechanical damage (for example, by a ball in a gym) and simultaneously prevents objects from coming into direct contact with the hot surface of the heating lamellas.

PROTECTIVE GRILLE	Cat. No.
FOR ECOSUN S+ 09–12	5401790
FOR ECOSUN S+ 18–24	5401792
FOR ECOSUN S+ 30–36	5401794




TERRACE HEATERS

► **ECOSUN TH** (Terrace Heaters) are designed for the zonal heating of winter gardens, enclosed and roofed balconies and terraces, garden tents, churches, etc. – i.e., applications where they are protected against direct contact with the effects of the weather. Tiltable brackets are included with the product.

	TYPE	[W]	[V]	Weight netto [kg]	Qty on pallet	Recommended clearance	Dimensions [mm]	Cat. No.
	ECOSUN TH 1000	1000	230	4.2	68	min. 1.8 m	1080×140×45	5401350
	ECOSUN TH 1500	1500		6.5	68		1580×140×45	5401353


■ **Class I; Rating IP 45; Colour:** matt black; **Connection cable:** 2 m cold lead with plug

■ The min. height at which such panels can be installed is 1.8 m above the floor (the lower edge of the panel); for panels installed on the ceiling there must be a min. gap of 30 cm between the ceiling and the upper edge of the panel.

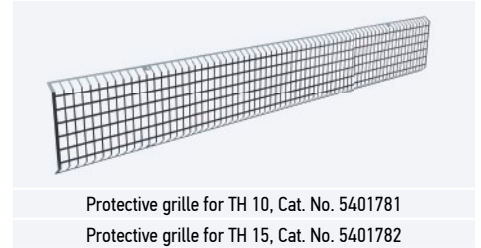

RADIANT HEATERS FOR CHURCH PEWS

► **ECOSUN CH** (Church Heaters) are designed for the heating of church pews with the heater placed below the pew seat. The product features a protective grille which prevents the user from coming into contact with the heating lamellas. The panel cover, protective grille and heating lamellas are matt black, and thus blend in very well with the dark wood of the pews without detracting from the dignity of the surrounding spiritual environment. The panels are fitted with mounting brackets for attaching them to the bottom side of the seat, and with a black two-metre connection cable in a silicone sheath.

	TYPE	[W]	[V]	Weight netto [kg]	Qty on pallet	Dimensions [mm]	Cat. No.	
	ECOSUN CH 02	260	230	3.8	20	730×155×115	5401359	
	ECOSUN CH 04	400		4.3		1096×155×115	5401360	
	ECOSUN CH 06	600		6.5		1596×155×115	5401362	

■ **Class I; Rating IP 44; Colour:** matt black; **Connection cable:** 2 m



WALL AND CEILING HEATING

(living space, bathrooms, offices, schools, churches, health care institutions, ...)



Where ECOSUN radiant panels can be used?




TERRACE HEATERS

(winter gardens, balconies/terraces,
garden tents, churches, ...)



INDUSTRIAL AND AGRICULTURAL USE

(halls, gyms, factories, stores, car washes,
hazardous areas, ...)

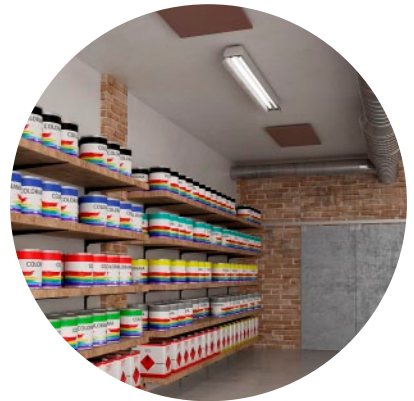

Presentation

ECOFLOOR electric floor heating systems ensure ideal heat distribution and, by decreasing undesirable air circulation, reduce dust levels. These systems offer great comfort, economic and reliable operation, and long lifetime. They preserve free floor space by eliminating the need for various heating elements, radiators and heat distribution systems. The principal advantage of electric floor heating is easy and separate temperature control in individual rooms. Once installed, it is completely maintenance free.

ECOFLOOR heating systems are available in two basic variants – **heating cable circuits and heating mats**. In fact the two systems do not differ from one another very much. In both cases, the heating system consists of a heating cable, either separate or fixed to a supporting fibreglass cloth (heating mat). This modern floor heating system permits easy and effective regulation.



1	2	3	4	5	6	Linear input of cable [W/m]
M	A	D	P	S	P	2 0 2 4 0
Total input of circuit [W]						

- 1 Resistance (heating) wire**
M multi-resistance – stranded resistance wire (to be used for higher outputs);
No letter is used for a non-stranded (simple) resistance wire
- 2 Core insulation**
A FEP (fluoropolymer)
P XLPE (cross-linked polyethylene)
- 3 Number of heating cores**
D double-core cable;
No letter is used for a single-core cable
- 4 Plastic insulation** (for outdoor applications, higher mechanical ruggedness of cable)
P XLPE (cross-linked polyethylene);
No letter is used for a cable without the second plastic insulation
- 5 Protection screen** (for wet areas)
S full screen protection (tinned copper wires and aluminium tape)
SL linear screen protection
No letter is used for a cable without screen protection
- 6 Jacket**
P XLPE (cross-linked polyethylene)
1P PP-LDPE (mixed polypropylene & low density PE)
V PVC (polyvinyl chloride)

The FENIX holding company has been specializing in the production of electric heating systems since the year 1990. During that period, we asserted ourselves not only on the Czech market, but also in almost 60 countries worldwide.

The success on these markets is conditioned particularly by the high quality of products, the professional approach to customers and the ability to flexibly respond to their demands. We are prepared to prove the quality of our ECOFLOOR products by providing a **lifetime warranty**, which was selected with care and respect for tradition and the time of FENIX's activity.

The **lifetime warranty** is provided for the life of the floor covering installed with the Ecofloor heating system ('covering' is taken to mean a layer of building material into which a heating element is embedded; alternatively, the heating element is inseparably connected to this layer or material).

The **lifetime warranty** is not transferable to another owner, and can be applied under the following conditions:

- All the conditions for the application of warranty have been met in accordance with the applicable warranty conditions
- The registration for the lifetime warranty has been made no later than 6 months from buying the Ecofloor heating system
- Cables for indoor applications are used in residential buildings
- The heating floor must be controlled by a thermostat with a floor probe
- The maximum linear input power of the heating circuit is 18 W/m, the maximum supply density is 200 W/m²

In the case that the conditions of the **lifetime warranty** are not fulfilled, the extended warranty is valid within the full extent of the warranty conditions offered by Fenix.



Overview of ECOFLOOR heating cables and recommended usage

TYPE	Wattage [W/m]	Number of heating cores	Protective screen	Protection against UV radiation	Thermal endurance of the jacket	Floor heating						Anti-freeze protection of			
						230 V	400 V	Supplied as circuit	Supplied as mat	Direct-heating	Semi-storage	Storage	Surfaces	Roofs	Pipes
ASL1P	10	1	●		70 °C	●		●	●	●					
	15		●			●	●	●							
	18		●			●	●	●							
ADSV	5	2	●		70 °C	●		●	●	●	●				
	7		●			●	●	●	●						
	10		●			●	●	●	●						
	15		●			●	●	●	●						
ADSV-T	12	2	●		70 °C	●		●	●	●					
	10		●			●	●	●							
	18		●			●	●	●							
ADSV+	18	2	●	●	80 °C	●		●	●	●					
	20		●			●	●	●							
	20		●			●	●	●							
ADSA	12	2	●		70 °C	●		●	●						
ADPSV	10	2	●	●	80 °C	●		●	●	●		●	●		
	18		●			●	●	●							
	20		●			●	●	●							
	30		●			●	●	●							
PSV	7	1	●		70 °C	●		●	●	●					
	10		●			●	●	●							
	15		●			●	●	●							
MAPSV	20	1	●	●	80 °C	●		●	●	●		●	●		
	30		●			●	●	●							
	30		●			●	●	●							
MADPSP	40	2	●	●	90 °C 240 °C*	●		●	●		●	●			
PFP	12	2	●	●	70 °C	●		●	●					●	
PDS1P	40	2	●	●	70 °C	●		●	●		●	●			
ELSR-M	10	2	●	●	65 °C	●		●	●	●					●
	15		●			●	●	●							
ELSR-N	20	2	●	●	80 °C	●		●	●	●		●	●		
	30		●			●	●	●							

Overview of ECOFLOOR heating mats and recommended usage

TYPE	Wattage [W/m ²]	Number of heating cores	Protective screen	Protection against UV radiation	Thermal endurance of the jacket	Floor heating				Type of heating cable	
						230 V	400 V	Direct-heating	Semi-storage		Storage
CM	150	2	●		70 °C	●		●	●	●	ADSA
	80		●			●	●	●			
LDTS	100	2	●		70 °C	●		●	●	●	ADSV-T
	160		●			●	●	●			
LD	160	1	●		70 °C	●		●	●	●	ASL1P
LSDTS	100	2	●		70 °C	●		●	●	●	ADSV-T
	160		●			●	●	●			
LPSV	100	1	●		80 °C	●		●	●	●	PSV
MST	300	1	●	●	80 °C	●		●	●	●	MAPSV
MDT	400	2	●	●	70 °C 240 °C*	●	●	●	●	●	MADPSP
ADPSV	300	2	●	●	80 °C	●		●	●	●	ADPSV
AL-MAT	80	2	●		70 °C	●		●	●	●	A2
	140		●			●	●	●			

ASL1P cable

LD heating mats




ADSV cable

ADSV heating circuits



ADSV-T cable

LDTS, LSDTS heating mats



ADSV+ cable

ADSV+ heating circuits



ADSA cable

CM ultrathin mats




ADPSV cable

ADPSV heating circuits, ADPSV heating mat



PSV cable

PSV heating circuits, LPSV heating mats



MAPSV cable

MAPSV heating circuits



MADPSP cable

MADPSP heating circuits, MDT heating mats



PDS1P cable

for curing concrete




ELSR-M cable

self-regulating cable for anti-freeze protection and technological heating (10 and 15 W/m)



ELSR-N cable

self-regulating cable for anti-freeze protection and technological heating (20 and 30 W/m EEII)



* for a short term (installation under asphalt)




VIDEO ECOFLOOR ▲

Direct heating systems


The heating cable circuits or mats are placed directly beneath tiles in a thin layer of permanently flexible cement so the tiled surface heats up relatively quickly (approx. 20 min). Temperature control is sensitive and quick to react. Heating cable circuits or mats are suitable for renovated floors where the final floor height is not a constraint.

► **PRODUCTS:** ADSV, ASL1P (heating cables); LDTS, LSDTS, LD, CM, ComfortMat, AL MAT (heating mats)

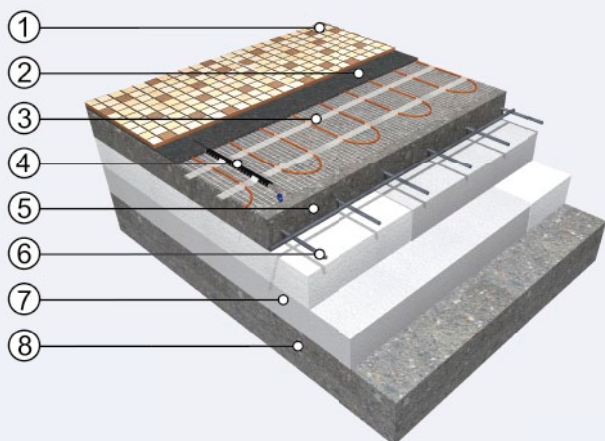

Direct heating system


- 1 wear layer (ceramic floor tiling)
- 2 flexible bonding cement
- 3 ECOFLOOR® heating mat
- 4 floor (limitation) probe in a protective tube (so-called goose neck)
- 5 load-bearing concrete floating board
- 6 steel reinforcement (so-called Kari mesh)
- 7 thermal insulation
- 8 base (concrete board)

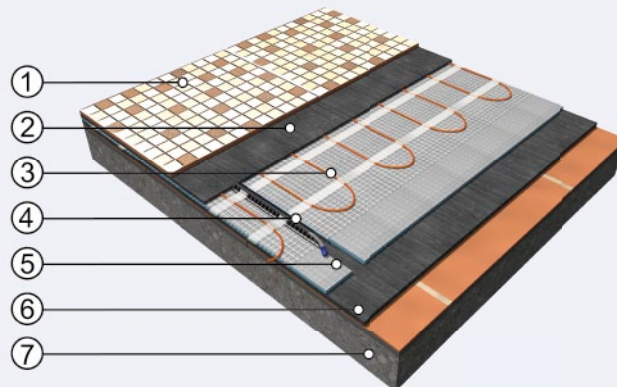

Direct heating system—reconstruction

- 1 wear layer (ceramic floor tiling)
- 2 flexible bonding cement
- 3 heating mat (cable) ECOFLOOR®
- 4 floor (limitation) probe in a protective tube (so-called goose neck)
- 5 F-BOARD supplementary thermal insulation (shortens the warming time) (see page 27)
- 6 flexible bonding cement
- 7 original floor (old floor tiling, concrete)

► **LDTS or LSDTS (self-adhesive) heating mat** – twin conductor cable with a full protection screen, width 50 cm, halogen free cold lead 1x3m. LDTS mats are provided with self-adhesive tape for affixing to the floor. LSDTS mats have a self-adhering mesh on their entire back surfaces. 230 V. Packing in cardboard box.



LDTS / LSDTS 160 W/m ²						LDTS 160 W/m ²						LDTS / LSDTS 100 W/m ²						LDTS 80 W/m ²					
1) [W]	TYPE	2) [m ²]	3) [m]	Cat. No. LDTS	Cat. No. LSDTS	1) [W]	TYPE	2) [m ²]	3) [m]	Cat. No. LDTS	1) [W]	TYPE	2) [m ²]	3) [m]	Cat. No. LDTS	Cat. No. LSDTS	1) [W]	TYPE	2) [m ²]	3) [m]	Cat. No. LDTS		
70	160/0.5	0.5	0.9	5530200	5531005	80	160-0.5	0.5	1.0	5540001	60	100/0.6	0.6	1.2	5530401	5531105	60	80/0.8	0.8	1.5	5531502		
130	160/0.8	0.8	1.6	5530205	5531010	160	160-1	1.0	2.0	5540002	105	100/1.0	1.0	2.1	5530403	5531110	105	80/1.3	1.3	2.6	5531504		
210	160/1.3	1.3	2.6	5530210	5531015	240	160-1.5	1.5	3.0	5540003	180	100/1.8	1.8	3.6	5530405	5531115	180	80/2.3	2.3	4.5	5531506		
260	160/1.6	1.6	3.2	5530220	5531020	320	160-2	2.0	4.0	5540004	220	100/2.2	2.2	4.4	5530410	5531120	220	80/2.8	2.8	5.5	5531508		
340	160/2.1	2.1	4.2	5530230	5531025	400	160-2.5	2.5	5.0	5540005	290	100/2.9	2.9	5.8	5530415	5531125	290	80/3.6	3.6	7.2	5531510		
410	160/2.6	2.6	5.2	5530240	5531030	480	160-3	3.0	6.0	5540006	410	100/4.1	4.1	8.2	5530420	5531130	410	80/5.1	5.1	10.2	5531512		
500	160/3.0	3.0	6.0	5530250	5531035	560	160-3.5	3.5	7.0	5540007	460	100/4.7	4.7	9.4	5530425	5531135	460	80/5.8	5.8	11.5	5531514		
560	160/3.4	3.4	6.7	5530255	5531040	640	160-4	4.0	8.0	5540008	560	100/5.6	5.6	11.2	5530430	5531140	560	80/7.0	7.0	14.0	5531516		
670	160/4.2	4.2	8.3	5530260	5531045	800	160-5	5.0	10.0	5540009	820	100/8.2	8.2	16.5	5530440	5531145	820	80/10.3	10.3	20.5	5531518		
810	160/5.1	5.1	10.2	5530270	5531050	960	160-6	6.0	12.0	5540010	1000	100/10.2	10.2	20.3	5530450	5531150	1000	80/12.5	12.5	25.0	5531520		
1000	160/6.1	6.1	12.3	5530280	5531055	1120	160-7	7.0	14.0	5540012	1200	100/11.8	11.8	23.7	5530460	5531155	1200	80/15.0	15.0	30.0	5531522		
1210	160/7.6	7.6	15.1	5530290	5531060	1280	160-8	8.0	16.0	5540014	1800	100/17.9	17.9	35.8	5530470	5531160	1800	80/22.5	22.5	45.0	5531524		
1400	160/8.8	8.8	17.6	5530190	5531080	1600	160-10	10.0	20.0	5540016													
1800	160/11.0	11.0	22.0	5530192	5531085	1920	160-12	12.0	24.0	5540018													
2150	160/13.3	13.3	26.6	5530194	5531090	2400	160-15	15.0	30.0	5540020													
2600	160/16.3	16.3	32.5	5530196	5531095																		

► **LD heating mat** – single conductor cable with a full protection screen, width up to 3m² – 30 cm, over 3m² – 50 cm, halogen free cold lead 2x5 m, 230 V. Packed in PE foil.

LD 160 W/m ²					
1) [W]	TYPE	2) [m ²]	3) [m]	[cm]	Cat. No.
100	160/0.6	0.6	2.0	Width 30 cm	5530005
150	160/0.9	0.9	3.0		5530007
180	160/1.1	1.1	3.6		5530010
300	160/1.8	1.8	6.1		5530020
360	160/2.3	2.3	7.6		5530030
500	160/3.0	3.0	10.0	Width 50 cm	5530040
700	160/4.3	4.3	8.6		5530050
850	160/5.3	5.3	10.6		5530060
950	160/5.9	5.9	11.8		5530070
1150	160/7.2	7.2	14.4		5530080
1700	160/10.7	10.7	21.4		5530090
2000	160/12.4	12.4	24.9		5530100
2500	160/15.7	15.7	31.3		5530110
3000	160/18.8	18.8	37.6		5530120



► **Ultra thin CM mat** – a very thin two conductor cable with a protective screen – suitable for damp areas (bathrooms, laundry rooms) as well as for standard rooms – ideal for placement into adhesive sealing cement directly under floor tiling; Ø of cable 2.7–3.4 mm, halogen free cold lead – 1x3m. 230 V. Width 50 cm.



CM 150 W/m ²											
1) [W]	TYPE	2) [m ²]	3) [m]	Cat. No.	1) [W]	TYPE	2) [m ²]	3) [m]	Cat. No.		
150	CM150/1	1.0	2.0	5540103	750	CM150/5	5.0	10.0	5540115		
225	CM150/1.5	1.5	3.0	5540105	900	CM 150/6	6.0	12.0	5540118		
300	CM150/2	2.0	4.0	5540107	1050	CM 150/7	7.0	14.0	5540120		
375	CM150/2.5	2.5	5.0	5540109	1200	CM 150/8	8.0	16.0	5540122		
450	CM150/3	3.0	6.0	5540111	1350	CM 150/9	9.0	18.0	5540124		
525	CM150/3.5	3.5	7.0	5540112	1500	CM 150/10	10.0	20.0	5540126		
600	CM150/4	4.0	8.0	5540113	1800	CM 150/12	12.0	24.0	5540128		
675	CM 150/4.5	4.5	9.0	5540114	2250	CM 150/15	15.0	30.0	5540130		

ECOFLOOR HEATING MAT INSTALLATION


- 1) Unroll the heating mat according to the layout drawing.
- 2) If you need to leave a space under fixed furniture, cut out the necessary part of the cloth and span the space with the cable (see fig. 2).
- 3) Level the layer of flexible cement with a smooth trowel.
- 4) Lay tiling on small areas (up to 4 m²) immediately, and on larger areas after 24 hours.



¹⁾ Output [W]; ²⁾ Surface [m²]; ³⁾ Length [m]

NEW

► **ADSV heating cable** – a twin conductor cable with a full protection screen suitable for wet areas. For direct floor heating or floor renovation (installation under tiles). Cable diameter 3.4–4.2 mm. 230 V. Halogen free cold lead 1×3 m.



Cables on drums		ADSV 5 W/m				ADSV 7 W/m				ADSV 10 W/m				ADSV 15 W/m				ADSV 18 W/m			
TYPE [Ω/m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.
122.5	2001510	45	5045	9.6	2232070	55	7055	7.9	2232046	65	10065	6.6	2232100	80	15080	5.4	2242405	160	18160	8.50	2243120
38.72	2001515	80	5080	17.1	2232072	100	7100	13.7	2232047	120	10120	11.4	2232105	140	15140	9.8	2242407	260	18260	14.50	2243125
14.020	2001520	140	5140	27	2232074	165	7165	22.9	2232048	200	10200	18.9	2232110	240	15240	15.7	2242410	320	18320	18.50	2243130
8.960	2001525	170	5170	34.7	2232076	205	7205	28.8	2232049	250	10250	23.6	2232115	300	15300	19.7	2242415	420	18420	24.00	2243135
5.232	2001530	220	5220	46	2232078	265	7265	38.2	2232050	320	10320	31.6	2232120	400	15400	25.3	2242420	520	18520	28.40	2243140
3.584	2001535	270	5270	54.7	2232080	320	7320	46.2	2232051	400	10400	36.9	2232125	470	15470	31.4	2242425	600	18600	34.4	2243145
2.568	2001540	320	5320	64.3	2232082	380	7380	54.2	2232052	450	10450	45.9	2232130	550	15550	37.4	2242430	680	18680	37.9	2243150
2.050	2001545	360	5360	71.7	2232084	430	7430	60	2232053	520	10520	49.6	2232135	630	15630	41	2242435	830	18830	46.1	2243155
1.382	2001550	430	5430	89.1	2232086	520	7520	73.7	2232054	600	10600	63.9	2232140	750	15750	51.1	2242440	1000	181000	57.5	2243160
0.926	2001555	530	5530	107.3	2232088	630	7630	90.3	2232055	750	10750	75.8	2232145	950	15950	59.9	2242445	1200	181200	68.9	2243165
0.638	2001560	640	5640	129.2	2232090	760	7760	108.8	2232056	950	10950	87.0	2232150	1100	151100	75.1	2242450	1500	181500	83.2	2243170
0.424	2001565	800	5800	157.4	2232092	940	7940	134	2232057	1100	101100	114.5	2232155	1350	151350	93.3	2242455	1700	181700	100.4	2243175
0.310	2001570	920	5920	185.5	2232094	1100	71100	155.1	2232058	1300	101300	131.3	2232160	1600	151600	106.7	2242460	2200	182200	122.7	2243180
0.196	2001575	1150	51150	234.7	2232096	1380	71380	195.6	2232059	1700	101700	158.5	2232165	2000	152000	135	2242462	2600	182600	149.6	2243185
0.136	2001580	1400	51400	277.8	2232098	1650	71650	235.7	2232060	2000	102000	194.5	2232170	2400	152400	162.1	2242465				

► **ASL1P heating cable** – a single-conductor cable with a full protection screen suitable for wet areas. For direct floor heating (installation under tiles). Halogen free cold lead 2×5 m. Cable diameter 3–3.4 mm. 230 V. Packed in PE foil.



Cables on drums		ASL1P 10 W/m				ASL1P 15 W/m				ASL1P 18 W/m			
TYPE [Ω/m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.
61.25	2005178												
27.13	2005179												
19.36	2005180	160	10160	17.0	2200160	200	15200	13.7	2201000	210	18210	11.9	2201060
7.010	2005181	280	10280	27.0	2200280	340	15340	22.2	2201005	350	18350	19.7	2201062
4.480	2005182	350	10350	33.7	2200350	420	15420	28.1	2201010	450	18450	24	2201064
2.616	2005183	450	10450	45.0	2200450	550	15550	36.8	2201015	570	18570	32.5	2201066
1.284	2005185	640	10640	64.0	2200640	800	15800	51.5	2201020	820	18820	46	2201068
0.857	2005187	800	10800	77.2	2200800	960	15960	64.3	2201025	1000	181000	56.5	2201070
0.691	2005188	960	10960	80.0	2200960	1070	151070	71.5	2201030	1100	181100	63.7	2201072
0.463	2005190	1100	101100	103.9	2201100	1300	151300	87.9	2201035	1400	181400	74.7	2201074
0.212	2005192	1600	101600	156.0	2201600	1900	151900	131.3	2201040	2000	182000	114.2	2201076
0.155	2005193	1900	101900	179.6	2201900	2200	152200	155.1	2201045	2400	182400	130.1	2201078
0.068	2005195	3000	103000	259.3	2203000	3400	153400	228.8	2201055	3000	183000	164.6	2201080
										3500	183500	203.4	2201082



¹⁾ Output [W]; ³⁾ Length [m]

KITS FOR DO-IT-YOURSELF INSTALLATION

DIRECT HEATING SYSTEMS

Kits for do-it-yourself installation have been designed for those users who do not want a complete electrical heating system but a comfortable, warm floor in a specific area (e.g. bathroom or kitchen). The kits include everything needed to install the floor heating system and are very reasonably priced.

► **ComfortMat** – kit for DIY includes: LDTS heating mat; TFT digital touch screen thermostat; protective tube for floor sensor; copper end piece; installation manual. Width of the heating mat is 50 cm. Halogen free cold lead. 230 V.

ComfortMat 160 W/m ²					ComfortMat 100 W/m ²				
1) [W]	TYPE	2) [m ²]	3) [m]	Cat. No.	1) [W]	TYPE	2) [m ²]	3) [m]	Cat. No.
70	12070-165	0.5	0.9	5590094	180	8180-105	1.8	3.6	5590148
130	12130-165	0.8	1.6	5590097	220	8220-105	2.2	4.4	5590150
210	12210-165	1.3	2.6	5590100	290	8290-105	2.9	5.8	5590152
260	12260-165	1.6	3.2	5590105	410	8410-105	4.1	8.2	5590155
340	12340-165	2.1	4.2	5590110	460	8460-105	4.7	9.4	5590157
410	12410-165	2.6	5.2	5590115	560	8560-105	5.6	11.2	5590160
500	12500-165	3.0	6.1	5590120	820	8820-105	8.2	16.5	5590165
560	12560-165	3.4	6.7	5590122					
670	12670-165	4.2	8.3	5590125					
810	12810-165	5.1	10.2	5590130					
1000	121000-165	6.1	12.3	5590135					
1210	121210-165	7.6	15.1	5590140					
1400	121400-165	8.8	17.6	5590145					



It is recommended that you install F-BOARD insulated tile backer board before laying ComfortMat. This will ensure quicker warm up times and reduce running costs (see page 27).






AL MAT

DIRECT HEATING SYSTEMS

AL MAT heating mats are intended for use under laminate and wooden floating floors installed in so-called moist areas – in bathrooms, for example. They are a variant of ECOFILM heating foils designed for applications where ECOFILM foils cannot be used.

► **AL MAT** – is of the two-core type, with one 3 m long halogen free connecting cable; the thickness of the mat is only 1.7 mm. 230 V.

AL MAT 140 W/m ²					AL MAT 80 W/m ²				
1) [W]	TYPE	2) [m ²]	3) [m]	Cat. No.	1) [W]	TYPE	2) [m ²]	3) [m]	Cat. No.
140	AL MAT 140/1	1	2	5543000	100	AL MAT 80/1,25	1.25	2.5	5543200
210	AL MAT 140/1,5	1.5	3	5543002	160	AL MAT 80/2	2	4	5543202
280	AL MAT 140/2	2	4	5543004	240	AL MAT 80/3	3	6	5543204
420	AL MAT 140/3	3	6	5543006	400	AL MAT 80/5	5	10	5543206
560	AL MAT 140/4	4	8	5543008	640	AL MAT 80/8	8	16	5543208
700	AL MAT 140/5	5	10	5543009	800	AL MAT 80/10	10	20	5543210
840	AL MAT 140/6	6	12	5543010	960	AL MAT 80/12	12	24	5543212
980	AL MAT 140/7	7	14	5543011					
1120	AL MAT 140/8	8	16	5543012					
1260	AL MAT 140/9	9	18	5543013					
1400	AL MAT 140/10	10	20	5543014					

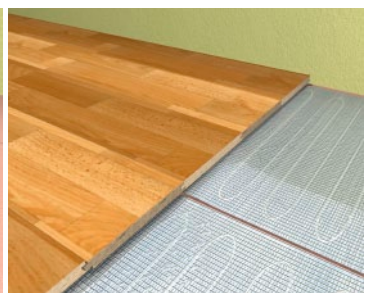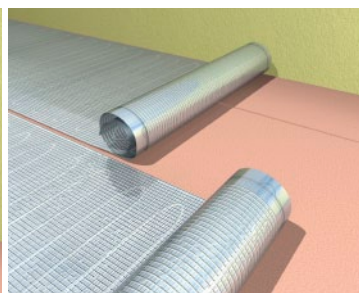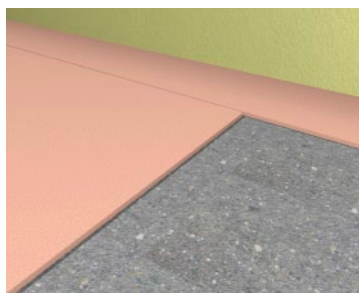

¹⁾ Output [W]; ²⁾ Surface [m²]; ³⁾ Length [m]

SEMI-STORAGE AND STORAGE HEATING



Semi-storage heating


Heating cables or mats in semi-storage systems are placed in a layer of concrete 4–5 cm thick. The mat's recommended output wattage is 160 W/m². Heat is accumulated for 16 hours a day at a time when electricity costs are lowest. The accumulated heat is radiated from the floor surface not only during the process, but also for a further 8 hours. One efficient solution is to divide the total desired heating system 70/30 between the floor heating and another source, such as a convection heater or an ECOSUN radiant panel.

► **PRODUCTS:** ADSV+, ADPSV, PSV (h. cables), LPSV (h. mat)

Storage heating


Storage floor heating is a system that takes advantage of cheaper electricity tariffs – usually at night. During this time, heat is accumulated into the mass of the floor using ECOFLOOR electrical heating cables or mats. Throughout the rest of the day, the heat is gradually released from the floor to the room. In storage systems, heating mats or cables are placed in a layer of concrete 10 to 14 cm thick. The accumulated—stored—heat is then released during the day into the area to be heated. We recommend an output wattage of 250 to 300 W/m² for ECOFLOOR mats used in this type of system. Eight hours of low-tariff electricity should be used to accumulate the heat.

► **PRODUCTS:** ADSV+, ADPSV, PSV (heating cables), LPSV (heating mat)

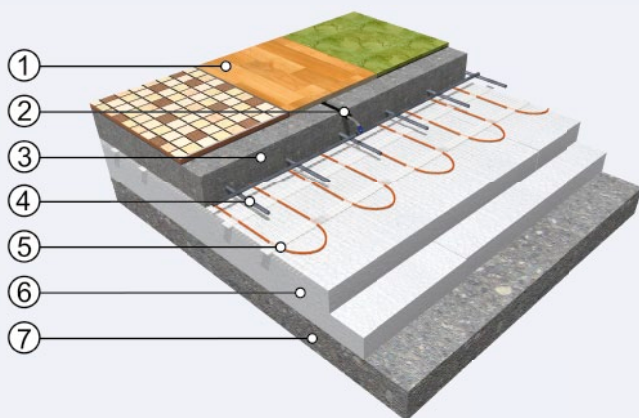

Semi-storage system

- 1 wear layer (floor tiling, carpet, PVC, laminate)
- 2 floor (limitation) probe in a protective tube (so-called goose neck)
- 3 load-bearing concrete floating board
- 4 steel reinforcement (so-called Kari mesh)
- 5 ECOFLOOR® heating mat (cable)
- 6 thermal insulation
- 7 base (concrete board)

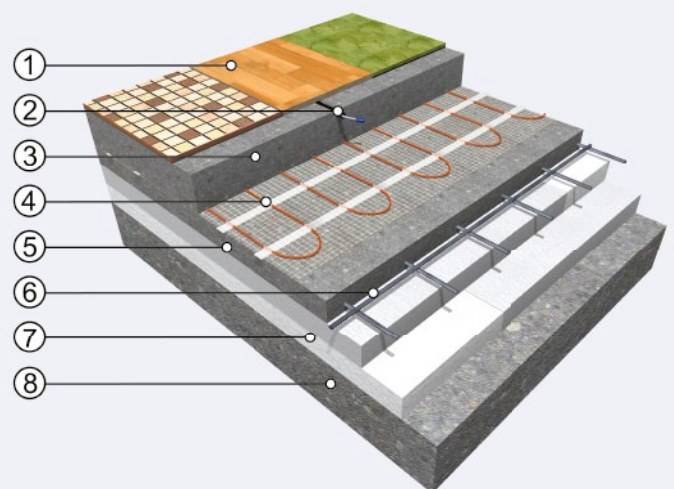


Storage heating

- 1 wear layer (floor tiles, carpet, PVC, laminate)
- 2 floor (limitation) probe in a protective tube (so-called goose neck)
- 3 concrete storage layer
- 4 ECOFLOOR® heating mat (cable)
- 5 concrete storage layer
- 6 steel reinforcement (so-called Kari mesh)
- 7 thermal insulation
- 8 base (concrete board)

► **ADSV+ heating cable** – a two-conductor cable with a full protection screen. The sheathing of the cable is resistant against UV radiation and is intended for floor heating and the removal of snow and ice from roofs and eaves troughs. 1×3 m cold lead. Ø 5.0 mm. 230 V.

ADSV+ 10 W/m				ADSV+ 18 W/m			
¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.
120	10120	11.4	2253000	160	18160	8.5	2253100
200	10200	18.9	2253005	260	18260	14.5	2253105
250	10250	23.6	2253010	320	18320	18.5	2253110
320	10320	31.6	2253015	420	18420	24.0	2253115
400	10400	36.9	2253020	520	18520	28.4	2253120
450	10450	45.9	2253025	600	18600	34.4	2253125
520	10520	49.6	2253030	680	18680	37.9	2253130
600	10600	63.9	2253035	830	18830	46.1	2253135
750	10750	75.8	2253040	1000	181000	57.5	2253140
950	10950	87.0	2253045	1200	181200	68.9	2253145
1100	101100	114.5	2253050	1500	181500	83.2	2253150
1300	101300	131.3	2253055	1700	181700	100.4	2253155
1700	101700	158.5	2253060	2200	182200	122.7	2253160
2000	102000	194.5	2253065	2600	182600	149.6	2253165

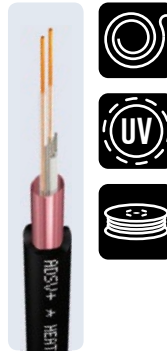


► **ADPSV heating cable** – a twin conductor cable with a full protection screen suitable for semi-storage and storage floor heating in living areas. Class M2. 1×5 m cold lead. Ø 5.3–5.9 mm. 230 V.

ADPSV 18 W/m			
¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.
160	18160	8.5	2249960
260	18260	14.5	2249963
320	18320	18.5	2249966
420	18420	24.0	2249969
520	18520	28.4	2249972
600	18600	34.4	2249975
740	18740	41.8	2249976
830	18830	46.1	2249978
1000	181000	57.5	2249981
1200	181200	68.9	2249984
1500	181500	83.2	2249987
1700	181700	100.4	2249990
2200	182200	122.7	2249992
2600	182600	149.6	2249993



NEW

► **PSV heating cable** – a single-conductor cable with a full protection screen for storage and semi-storage heating. Cold lead 2×5 m. 230 V. Cable diameter 4.5–4.8 mm.



Cables on drums		PSV 7 W/m				PSV 10 W/m				PSV 15 W/m			
TYPE [Ω/m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.
19.36	2001210	140	7140	19.5	2320000	170	10170	16.1	2320020	200	15200	13.7	2320110
7.01	2001215	230	7230	32.8	2320001	280	10280	28.0	2320025	340	15340	22.2	2320115
4.48	2001220	290	7290	40.7	2320002	350	10350	34.0	2320030	420	15420	28.1	2320120
2.616	2001225	380	7380	53.2	2320003	450	10450	46.0	2320035	550	15550	36.7	2320125
1.792	2001230	460	7460	64.2	2320004	550	10550	53.7	2320040	660	15660	44.7	2320130
1.284	2001235	540	7540	76.3	2320005	640	10640	64.4	2320045	800	15800	52.3	2320135
1.025	2001240	600	7600	86.0	2320006	720	10720	71.7	2320050	880	15880	58.6	2320140
0.857	2001245	660	7660	93.5	2320007	800	10800	79.1	2320055	960	15960	64.1	2320145
0.691	2001250	730	7730	104.9	2320008	870	10870	88.0	2320060	1070	151070	71.5	2320150
0.54	2001255	830	7830	118.0	2320009	960	10960	100.0	2320065	1210	151210	81.0	2320155
0.463	2001260	900	7900	126.9	2320010	1100	101100	106.8	2320070	1300	151300	84.1	2320160
0.319	2001265	1 080	71080	153.5	2320011	1280	101280	129.6	2320075	1580	151580	104.6	2320165
0.212	2001270	1 320	71320	189.0	2320012	1600	101600	157.9	2320080	1900	151900	128.6	2320170
0.155	2001275	1 550	71550	220.2	2320013	1900	101900	189.6	2320085	2200	152200	150.3	2320175
0.098	2001280	1 950	71950	276.8	2320014	2500	102500	234.7	2320090	2800	152800	189.4	2320180
0.068	2001285	2 340	72340	332.5	2320015	3000	103000	277.8	2320095	3400	153400	227.5	2320185



► **LPSV heating mat** – single conductor cable with a full protection screen, width 50 cm, cold lead 2×5 m. Packed on a cardboard tube and sealed in PE foil. 230 V.

LPSV 80 W/m ²				
¹⁾ [W]	TYPE	²⁾ [m ²]	³⁾ [m]	Cat. No.
160	LPSV 80/2	2	4	5520310
240	LPSV 80/3	3	6	5520312
320	LPSV 80/4	4	8	5520314
400	LPSV 80/5	5	10	5520316
480	LPSV 80/6	6	12	5520318
560	LPSV 80/7	7	14	5520320
640	LPSV 80/8	8	16	5520322
720	LPSV 80/9	9	18	5520324
800	LPSV 80/10	10	20	5520326
960	LPSV 80/12	12	24	5520328
1040	LPSV 80/13	13	26	5520330
1200	LPSV 80/15	15	30	5520332
1440	LPSV 80/18	18	36	5520334
1680	LPSV 80/21	21	42	5520336
2240	LPSV 80/28	28	56	5520338



¹⁾ Output [W]; ²⁾ Surface [m²]; ³⁾ Length [m]




Ice and snow melting

Installing electric heating cables in outdoor areas, together with a thermostat, prevents both ice formation and snow accumulation. Once installed, the system works entirely automatically and is only operational when it is snowing or if ice is forming on roads and walkways.


De-icing gutters and eaves troughs

In all parts of Europe other than in the south, winter brings a heavy load to many buildings as ice builds up in the gutters and eaves troughs. Installing an ECOFLOOR electric heating cable (with a protective screen) into gutters and eaves troughs is a good solution for such problems. The cables are installed using special plastic clips placed inside gutters and eaves troughs. We recommend a linear wattage of 20 W/m for the de-icing cables.

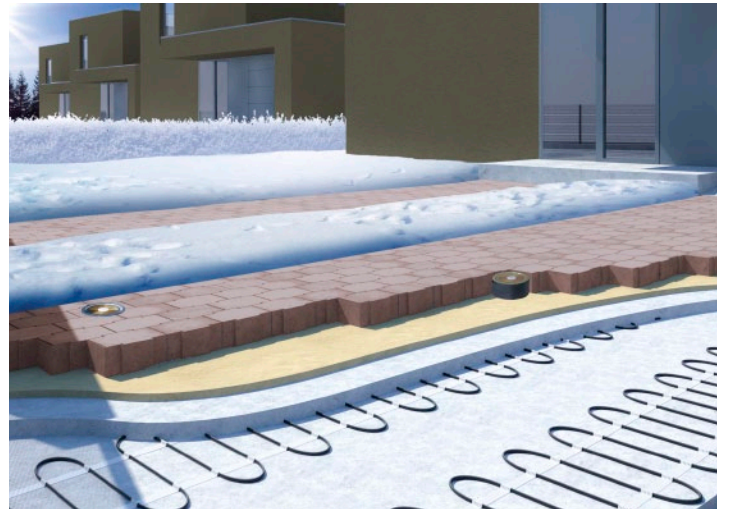

Frost protection of pipes

Many homeowners and other users of piping have many troubles in the winter due to freezing pipes. This especially applies to water pipes, but other liquids used in industrial processes can also freeze or solidify. During long spells of below-freezing temperatures, even very well-insulated piping can freeze. Supplementary heating is a reliable preventive solution.

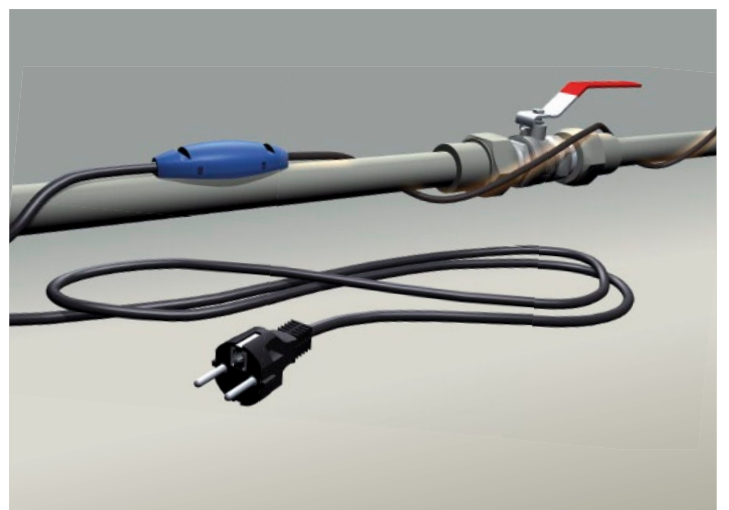

► **MAPSV heating cable** – a single-conductor cable with a full protection screen and protection against UV radiation. Suitable for heating outdoor surfaces. Cold lead 2x5 m. Ø 5.9–6.4 mm. Packed in PE foil.

30 W/m for ice and snow melting, removing ice and snow from roofs and gutters.
A control system with an air temperature and moisture sensor must be used to prevent cables from switching on in temperatures of more than +5 °C. →

TYPE	Suitability	Max. loading
Floor heating in living areas	Yes	30 W/m
Outdoor surface heating	Yes	30 W/m
Removing ice and snow from roofs and gutters	Yes	30 W/m



Cables on drums		MAPSV 20 W/m – 230 V				MAPSV 30 W/m – 230 V				MAPSV 30 W/m – 400 V			
TYPE [Ω/m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.
9.00	2000850	340	20340	17.3	2322500	420	30420	14.0	2322600	730	30730	24.4	2322700
6.50	2000852	400	20400	20.3	2322502	500	30500	16.3	2322602	850	30850	29.0	2322702
3.20	2000854	570	20570	29.0	2322504	700	30700	23.6	2322604	1230	301230	40.7	2322704
1.35	2000856	880	20880	44.5	2322506	1100	301100	35.6	2322606	1900	301900	62.4	2322706
1.00	2000858	1030	201030	51.4	2322508	1250	301250	42.3	2322608	2200	302200	72.7	2322708
0.60	2000860	1350	201350	65.3	2322510	1600	301600	55.1	2322610	2800	302800	95.2	2322710
0.36	2000862	1750	201750	84.0	2322512	2100	302100	70.0	2322612	3700	303700	120.1	2322712
0.25	2000864	2100	202100	100.8	2322514	2500	302500	84.6	2322614	4400	304400	145.5	2322714
0.183	2000866	2400	202400	120.4	2322516	2950	302950	98.0	2322616	5100	305100	171.4	2322716
0.155	2000868	2600	202600	131.3	2322518	3200	303200	106.7	2322618	5600	305600	184.3	2322718
0.098	2000870	3300	203300	163.6	2322520	4000	304000	134.9	2322620	7000	307000	233.2	2322720
0.068	2000872	4000	204000	194.5	2322522	4800	304800	162.1	2322622	8500	308500	276.8	2322722
0.04	2000874	5100	205100	259.3	2322524	6300	306300	209.9	2322624	11000	3011000	363.6	2322724

► **MADPSP heating cable / MDT heating mat** – a two-conductor cable with a full protection screen and protection against UV radiation. Suitable for heating outdoor surfaces. Class M2. Cold lead 1x5 m. Ø 6.3–9 mm. MDT heating mat: width 0.75 m. Packed in PE foil.

40 W/m for ice and snow melting.
A control system with an air temperature and moisture sensor must be used to prevent cables from switching on in temperatures of more than +5 °C. →

TYPE	Suitability	Max. loading
Outdoor surface heating	Yes	40 W/m



Cables on drums		MADPSP 40 W/m – 230 V				MADPSP 40 W/m – 400 V				MDT mat 400 W/m ² – 230 V				MDT mat 400 W/m ² – 400 V					
TYPE [Ω/m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.	¹⁾ [W]	TYPE	²⁾ [m ²]	³⁾ [m]	Cat. No.	¹⁾ [W]	TYPE	²⁾ [m ²]	³⁾ [m]	Cat. No.
18.00	2000700	340	40340	8.5	2323505	600	40600	15	2323605	340	23MDT400/0,9	0.9	1.1	5510005	600	40MDT400/1,5	1.5	2.0	5510105
6.40	2000705	570	40570	14.5	2323510	1000	401000	25	2323610	570	23MDT400/1,4	1.4	1.9	5510010	1000	40MDT400/2,5	2.5	3.3	5510110
2.70	2000710	880	40880	22	2323515	1520	401520	39	2323615	880	23MDT400/2,3	2.2	2.9	5510015	1520	40MDT400/3,8	3.8	5.1	5510115
2.00	2000715	1030	401030	26	2323520	1800	401800	45	2323620	1030	23MDT400/2,6	2.6	3.4	5510020	1800	40MDT400/4,5	4.5	6.0	5510120
1.20	2000720	1320	401320	33	2323525	2300	402300	58	2323625	1320	23MDT400/3,3	3.3	4.4	5510025	2300	40MDT400/5,8	5.8	7.7	5510125
0.72	2000725	1700	401700	43	2323530	2970	402970	75	2323630	1700	23MDT400/4,3	4.3	5.7	5510030	2970	40MDT400/7,4	7.4	9.9	5510130
0.60	2000730	1880	401880	47	2323535	3300	403300	81	2323635	1880	23MDT400/4,7	4.7	6.3	5510035	3300	40MDT400/8,3	8.3	11.0	5510135
0.36	2000735	2450	402450	60	2323540	4250	404250	105	2323640	2450	23MDT400/6,1	6.1	8.2	5510040	4250	40MDT400/10,6	10.6	14.2	5510140
0.25	2000737	2900	402900	73	2323545	5100	405100	126	2323645	2900	23MDT400/7,3	7.3	9.7	5510045	5100	40MDT400/12,8	12.8	17.0	5510145
0.18	2000740	3400	403400	85	2323550	5900	405900	148	2323650	3400	23MDT400/8,5	8.5	11.3	5510050	5900	40MDT400/14,8	14.8	19.7	5510150
0.08	2000745	5200	405200	127	2323555	9000	409000	222	2323655	5200	23MDT400/13	13.0	17.3	5510055	9000	40MDT400/22,5	22.5	30.0	5510155
0.04	2000750	7350	407350	180	2323560					7350	23MDT400/18,4	18.4	24.5	5510060					




¹⁾ Output [W]; ²⁾ Surface [m²]; ³⁾ Length [m]

► **ADPSV heating cable / mat** – a twin conductor, full protection screened cable with protection against UV radiation. This multipurpose cable is suitable for indoor and outdoor applications. Class M2. 1×5 m cold lead. Ø 5.0–5.9 mm. ADPSV heating mat: width 0.5 m. Packed in PE foil.

TYPE	Suitability	Max. loading
Outdoor surface heating	Yes	30 W/m
Frost protection of pipes	Yes	10 W/m
Pipe heating	Yes	10 W/m
Removing ice and snow from roofs and gutters	Yes	30 W/m




Cables on drums		ADPSV 10 W/m – 230 V				ADPSV 20 W/m – 230 V				ADPSV 30 W/m – 230 V				ADPSV 30 W/m – 400 V				ADPSV mat 300 W/m ² – 230 V					
TYPE [Ω/m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.	¹⁾ [W]	TYPE	³⁾ [m]	Cat. No.	¹⁾ [W]	TYPE	²⁾ [m ²]	³⁾ [m]	Cat. No.	
38.72	2000501	120	10120	11.4	2256010	160	20160	8.3	2252800	195	30195	7	2253505	350	30350	12	2253605	300	23ADPSV 300/1-0,5	1.0	2.0	5510505	
14.02	2000504	200	10200	18.9	2256015	270	20270	14.0	2252805	340	30340	11	2253510	580	30580	20	2253610	450	23ADPSV 300/1,5-0,5	1.5	3.0	5510510	
8.96	2000511	250	10250	23.6	2256020	340	20340	17.2	2252810	420	30420	14	2253515	730	30730	24	2253615	600	23ADPSV 300/2-0,5	2.0	4.0	5510515	
5.232	2000516	320	10320	31.6	2256025	450	20450	22.5	2252815	560	30560	18	2253520	950	30950	32	2253620	750	23ADPSV 300/2,5-0,5	2.5	5.0	5510520	
3.58	2000521	400	10400	36.9	2256030	540	20540	27.4	2252820	670	30670	22	2253525	1150	301150	39	2253625	900	23ADPSV 300/3-0,5	3.0	6.0	5510525	
2.568	2000526	450	10450	45.9	2256035	640	20640	32.1	2252825	800	30800	26	2253530	1360	301360	46	2253630	1050	23ADPSV 300/3,5-0,5	3.5	7.0	5510530	
1.714	2000536	550	10550	56.1	2256040	780	20780	39.3	2252830	970	30970	32	2253535	1670	301670	56	2253635	1200	23ADPSV 300/4-0,5	4.0	8.0	5510535	
1.382	2000541	600	10600	63.9	2256045	870	20870	43.8	2252835	1060	301060	36	2253540	1850	301850	63	2253640	1500	23ADPSV 300/5-0,5	5.0	10.0	5510540	
0.926	2000551	750	10750	75.8	2256050	1070	201070	53.5	2252840	1300	301300	44	2253545	2250	302250	76	2253645	1800	23ADPSV 300/6-0,5	6.0	12.0	5510545	
0.638	2000556	950	10950	87.0	2256055	1290	201290	64.4	2252845	1600	301600	52	2253550	2720	302720	92	2253650	2100	23ADPSV 300/7-0,5	7.0	14.0	5510550	
0.424	2000561	1100	101100	114.5	2256060	1580	201580	79.0	2252850	1940	301940	65	2253555	3350	303350	114	2253655	2700	23ADPSV 300/9-0,5	9.0	18.0	5510555	
0.31	2000566	1300	101300	131.3	2256065	1850	201850	92.4	2252855	2250	302250	76	2253560	3900	303900	132	2253660	3000	23ADPSV 300/10-0,5	10.0	20.0	5510560	
0.196	2000571	1700	101700	158.5	2256070	2300	202300	117.3	2252865	2800	302800	96	2253565	5000	305000	163	2253665						
0.136	2000576	2000	102000	194.5	2256075	2750	202750	141.4	2252870	3400	303400	114	2253570	6000	306000	196	2253670						

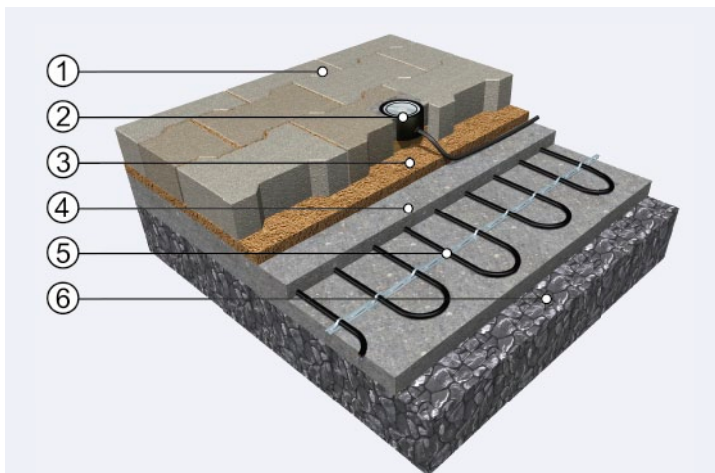


DRIVEWAY

- 1 hardened surface, e.g. interlocking pavement
- 2 humidity sensor (water, snow, ice)
- 3 sand bed of the interlocking pavement
- 4 concrete board (protects the heating cable from vehicle load)
- 5 heating cable/heating mat ECOFLOOR®
- 6 firm gravel base (macadam)

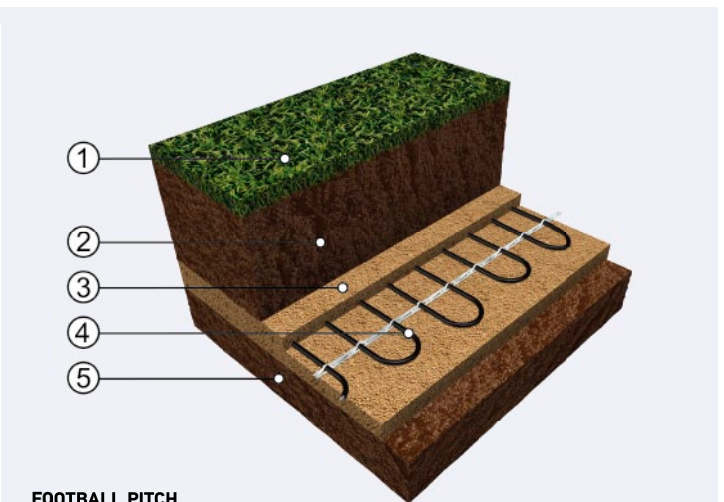


FOOTBALL PITCH

- 1 grass
- 2 soil layer, approx. 30 cm thick
- 3 sand bedding, approx. 7 cm (compacted) and approx. 3 cm thick fill
- 4 heating cable ECOFLOOR®
- 5 Levelled solid base (existing soil)

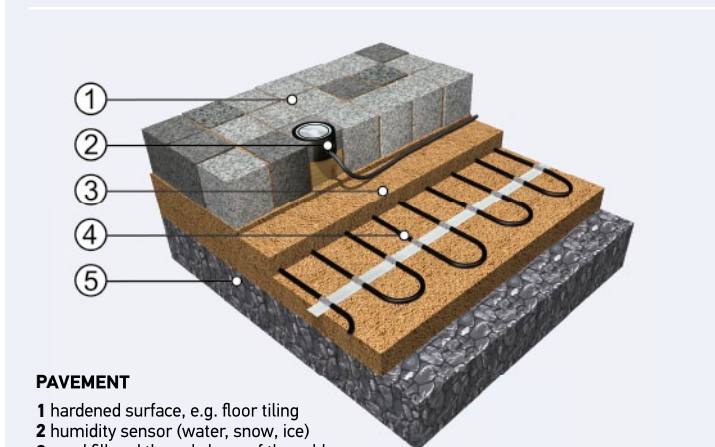

PAVEMENT

- 1 hardened surface, e.g. floor tiling
- 2 humidity sensor (water, snow, ice)
- 3 sand fill and the sub-base of the cable
- 4 heating cable/heating mat ECOFLOOR®
- 5 firm gravel base (macadam)

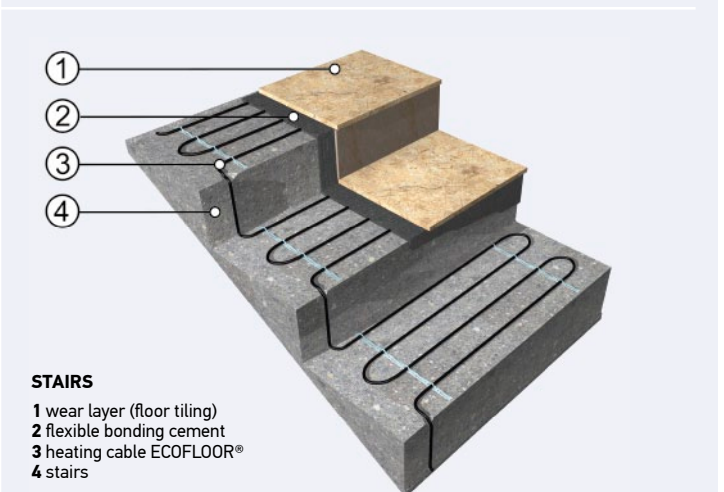

STAIRS

- 1 wear layer (floor tiling)
- 2 flexible bonding cement
- 3 heating cable ECOFLOOR®
- 4 stairs

¹⁾ Output [W]; ²⁾ Surface [m²]; ³⁾ Length [m]

► **MST heating mat** – a single-conductor cable with a full protection screen and protection against UV radiation. Suitable for heating outdoor surfaces. \varnothing 5.0–5.5 mm. For easy installation MST heating mats are provided with a 1×5 m cold lead and another 1×5 m cold lead + the length of the mat. Width 0.5 m. 230 V. Packed in PE foil.




MST mat 300 W/m² – 230 V

1) [W]	TYPE	2) [m ²]	3) [m]	Cat. No.
3600	23MST 300/12-0.5	12.0	24.0	5501145
4500	23MST 300/15-0.5	15.0	30.0	5501150
6000	23MST 300/20-0.5	20.0	40.0	5501155



► **ADSV+ heating cable** – a two-conductor cable with a full protection screen. The sheathing of the cable is resistant against UV radiation and is intended for floor heating and the removal of snow and ice from roofs and eaves troughs. 1×3 m cold lead. \varnothing 5.0 mm. 230 V.



TYPE	Suitability	Max. loading
Floor heating in living areas	Yes	20 W/m
Outdoor surface heating	No	–
Frost protection of pipes	Yes	10 W/m
Pipe heating	Yes	10 W/m
Removing ice and snow from roofs and gutters	Yes	20 W/m

ADSV+ 10 W/m – 230 V

1) [W]	TYPE	3) [m]	Cat. No.
120	10120	11.4	2253000
200	10200	18.9	2253005
250	10250	23.6	2253010
320	10320	31.6	2253015
400	10400	36.9	2253020
450	10450	45.9	2253025
520	10520	49.6	2253030
600	10600	63.9	2253035
750	10750	75.8	2253040
950	10950	87.0	2253045
1100	101100	114.5	2253050
1300	101300	131.3	2253055
1700	101700	158.5	2253060
2000	102000	194.5	2253065

ADSV+ 18 W/m – 230 V

1) [W]	TYPE	3) [m]	Cat. No.
160	18160	8.5	2253100
260	18260	14.5	2253105
320	18320	18.5	2253110
420	18420	24.0	2253115
520	18520	28.4	2253120
600	18600	34.4	2253125
680	18680	37.9	2253130
830	18830	46.1	2253135
1000	181000	57.5	2253140
1200	181200	68.9	2253145
1500	181500	83.2	2253150
1700	181700	100.4	2253155
2200	182200	122.7	2253160
2600	182600	149.6	2253165

ADSV+ 20 W/m – 230 V



1) [W]	TYPE	3) [m]	Cat. No.
160	20160	8.3	2253200
270	20270	14.0	2253205
340	20340	17.2	2253210
450	20450	22.5	2253215
540	20540	27.4	2253220
640	20640	32.1	2253225
720	20720	35.8	2253230
870	20870	43.8	2253235
1070	201070	53.5	2253240
1290	201290	64.4	2253245
1580	201580	79.0	2253250
1850	201850	92.4	2253255
2300	202300	117.3	2253260
2750	202750	141.4	2253265

NEW

► **PFP – automatic heating cable** with a thermostat, electrical socket connection, the thermostat switches on at +3 °C, 1.5 m connection cable with plug, IP 66 coverage. 230 V. 12–490 W – packing in cardboard box, 620–1260 W – packing in PE foil.

PFP

1) [W]	TYPE	3) [m]	Cat. No.
12	PFP 1m/12W	1	2330150
25	PFP 2m/25W	2	2330152
36	PFP 3m/36W	3	2330154
48	PFP 4m/48W	4	2330156
72	PFP 6m/72W	6	2330158
136	PFP 10m/136W	10	2330160
152	PFP 14m/152W	14	2330162
281	PFP 21m/281W	21	2330164
337	PFP 30m/337W	30	2330166
490	PFP 42m/490W	42	2330168
620	PFP 50m/620W	50	2330169
660	PFP 58m/660W	58	2330170
810	PFP 70m/810W	70	2330171
1030	PFP 80m/1030W	80	2330172
1260	PFP 100m/1260W	100	2330173

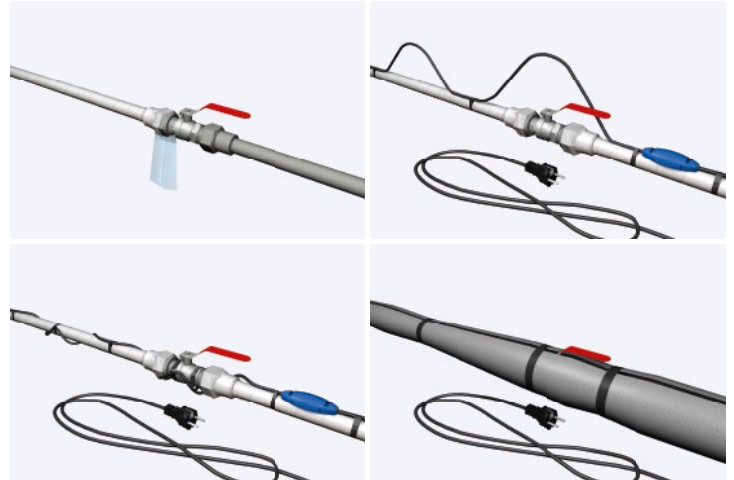

1) Output [W]; 2) Surface [m²]; 3) Length [m]

SPECIAL APPLICATIONS

S-MAT (SNOWMAT)

Heated rubber mat is intended mainly for entry cleaning zones in shops and shopping centres but can be used anywhere where in winter periods the protection is required.

ADVANTAGES: effortless maintenance of the required areas from snow and black ice, simple installation and handling, Commercial loading – may also be loaded with lighter carts with rubber wheels.

Technical parameters: 5 m supply lead with plug; mat IP 65, plug IP 54; 230 V / 50 Hz.



1) [W]	TYPE	HEATING AREA		TOTAL		THICKNESS [mm]	WEIGHT NETTO [kg]	Cat. No.
		WIDTH [m]	LENGTH [m]	WIDTH [m]	LENGTH [m]			
S-MAT 390 W/m²								
460	SM 1.5/460	0.82	1.44	1	1.55	8	15	5504505
SM-W 390 W/m²								
485	SM-W 1.5/485	0.82	1.44	1	1.55	9.5	16.7	5504507



D-MAT (DE-ICING MAT)

Intended for outdoor use as anti-freeze protection in industrial applications and in the construction industry – for example, for the warming of the earth in excavation pits or of stored friable materials, the warming of cables on reels, maintenance of warmth in parts of machines or in tools, etc. The sheet is also suitable for use in extreme winter conditions.

Technical parameters: IP 56 rating; heated area 1.2×2.85 m (3.4m²); total sheet dimensions 1.5×3.05 m; 5 m supply lead ends in a SCHUKO plug. 230 V / 50 Hz; 9.6 kg.

1) [W]	TYPE	HEATING AREA		TOTAL		THICKNESS [mm]	WEIGHT NETTO [kg]	Cat. No.
		WIDTH [m]	LENGTH [m]	WIDTH [m]	LENGTH [m]			
D-MAT 280 W/m²								
950	DM 3.4/950	1.2	2.85	1.5	3.05	4	9.6	5505000



W-MAT (WORKMAT)

We are now introducing a smaller version of the product – the heated rubber mat W-Mat. As its name suggests, heated mats are intended for use in protecting workers against cold emanating from floors – most often in industrial workplaces, where the character of activities taking place involves employees spending long periods in small and limited areas.

Technical parameters: IP 65 rating; 230 V / 50 Hz; Protection class I.; dimensions 1×0.6 m; 6.6 kg.

1) [W]	TYPE	HEATING AREA		TOTAL		THICKNESS [mm]	WEIGHT NETTO [kg]	Cat. No.
		WIDTH [m]	LENGTH [m]	WIDTH [m]	LENGTH [m]			
W-MAT 200 W/m²								
68	WM 0.6/68	0.4	0.85	0.6	1	8	5.65	5504405




1) Output [W]

CONCRETE CURING CABLE CIRCUITS

Heating cables used to speed up the curing of concrete in the winter period. They are intended for short-term use, and are employed once only; after the curing process has ended, the cables are disconnected and they remain in the concrete block. A twin conductor screened cable PDS1P with a 1×2m cold lead with plug connection. 230 V. Packed in PE foil.



¹⁾ [W]	TYPE	Length [m]	Cat. No.	¹⁾ [W]	TYPE	Length [m]	Cat. No.
PDS1P 40 W/m							
130	40130	3.3	2325000	1500	401500	38.0	2325020
380	40380	10.0	2325005	2200	402200	55.0	2325025
735	40735	20.0	2325008	3200	403200	85.0	2325028
1400	401400	35.0	2325018				



SELF-REGULATING CABLES

The cable is formed by two copper conductors between which there is a semi-conductive heating core. When the ambient temperature rises, the resistance of the heating core increases and its output thus decreases. The opposite is true when the temperature drops – the output of the cable increases. The cables can thus touch and cross one another or pass through environments with different temperatures without there being a danger of overheating or burning.



MARKING	Output [W/m] 10 °C	Temperature tolerance [°C]	Limitation for installation		Max. length at the switch. temperature 0 °C and installed circuit breaker [m]			Cat. No.
			Min. temp.	Min. radius	10 A	16 A	20 A	
ELSR-M – Frost protection of pipe					10 A	16 A	20 A	
ELSR-M – 10 B0	10	65	-30°C	25 mm	115.5	115.5	115.5	2330310
ELSR-M – 15 B0	15	65	-30°C	25 mm	83	97.5	97.5	2330315
ELSR-N – Frost protection of trays, gutters, roofs, technological heating					16 A	20 A	25 A	
ELSR-N – 20 B0	20	80	-10°C	25 mm	92	115	119	2330320
ELSR-N – 30 B0	30	80	-10°C	25 mm	71	89	105	2330330
KIT Nr. 4	For connection and termination of self-limiting cables							5030124
Cold lead for self-regulating cables								
SK 1.5	Limitation: 12 A / 20 m							2000790
SK 2.5	Limitation: 20 A / 20 m							2000795

Industrial applications:


- ➔ Analyzer lines – prevent condensation
- ➔ Cooling water lines – anti-freeze protection
- ➔ Potable water lines – anti-freeze protection
- ➔ Caustic soda – prevents crystallization under 30 °C
- ➔ Oils and fats – maintain pumpable viscosity
- ➔ Heating oil – prevents wax dispersion
- ➔ Vessel – anti-freeze and condensation protection

F-BOARD FLOOR INSULATION

F-BOARDS prevent heat losses to the subfloor structure. Recommended for floor reconstructions.

TYPE	Dimensions [mm]	Thickness [mm]	Area [m ²]	Bulk density [kg/m ³]	Thermal Conductivity [W/mK]	Weight netto [kg/board]	Packaging		Packets on the pallet	Cat. No.
							Boards in packet	[m ²]		
F-BOARD FLOOR INSULATION										
F-BOARD 6	1200×600×6	6	0.72	36	0.035	1.8	10	7.2	20	5442026
F-BOARD 10	1200×600×10	10				2.0			15	5442027
F-BOARD 6	1200×600×6	6		35	0.033	2.35	6	4.32	70	5442020
F-BOARD 10	1200×600×10	10				2.37			50	5442021

- **Material:** Extruded Polystyrene core with Polymer cement outer skin;
- **Compressive strength:** ≥ 300 kPa; **Water absorption:** immersion ≤ 1.5% vol, capillary Nil;
- Co-efficient of Linear Expansion:** 0.07 mm/mK; **Flammability:** B1

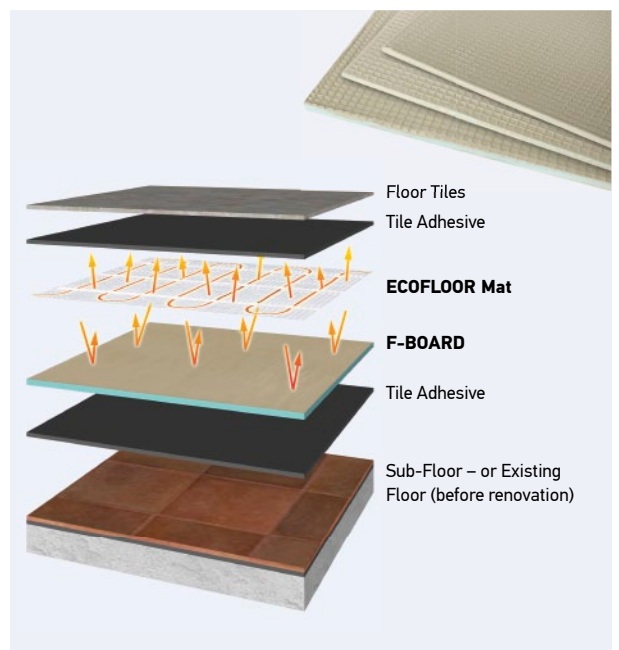


¹⁾ Output [W]; ²⁾ Surface [m²]; ³⁾ Length [m]

ECOFLOOR ACCESSORIES

PRODUCT / Description	Q. ¹⁾	Cat. No.
ECOFLOOR ACCESSORIES		
GUTTER CLIP 100 ; Intended for standard 100 mm semicircular gutters – install approx. 4 pcs/1 m (spacing 25 cm). 1 package = 25 pcs	1 package	2350000
GUTTER CLIP 150 ; Material: frost-resistant plastic, suitable for self-regulating cable. 1 package = 25 pcs	1 package	2350007
DOWNPIPE CABLE CLIP ; For the attachment of a cable on a chain in the downspout – install approx. 4 pcs/1 m (spacing 25 cm). 1 package = 25 pcs	1 package	2350003
CHAIN , 1 package = 10 m. Material: frost-resistant plastic.	1 package	2350004
GRUFAST – spacing of grips: 3.5 cm. Universal fixing tape for the fixation of heating cables. Consumption: approx. 1 pc/ 4 m ² . 1 unit = 10 m, NOT suitable for outdoor environments	1 unit	4200013
CABLE FIX AL 25 – universal fixation strip for heating cables, suitable also for outdoor use – e.g. for roof gutters – thanks to the materials used (aluminium). DIMENSIONS: thickness 0.5 mm; width 21 mm; length 10 m; axial spacing of the grips 25 mm	1 unit	4200016
PLASTIC CABLE CLIP , 1 package = 60 pcs	1 package	1200002
PLASTIC CABLE CLIP , 1 package = 50 pcs, blue. For the manual installation of heating cables/mats. Cannot be used with the installation tool.	1 package	1200000
INSTALLATION TOOL for the comfortable installation of plastic cable clips	1 unit	1200010
T-STRIP ; material: plastic; strip length 0.5 m; fixation of heating cables with a diameter of 3.5–9 mm. Axial distance of grips 1 cm, total strip height 10 mm, option of connecting the strips.	1 package = 20 pcs	2350009

PRODUCT / Description	Q. ¹⁾	Cat. No.	
COPPER END PIECE – intended as an end piece for a flexible tube ("gooseneck"): outer diameter 11.4 mm / inner diameter 8.5mm – used to prevent sealant (anhydrite, concrete) from entering the gooseneck containing the floor probe and to improve the transfer of heat to the thermistor of the probe = more precise measurement of floor temperatures	1 unit	2350021	
SELF-ADHESIVE ALUMINIUM TAPE – width 50 mm, length 50 m. Designed for the fixation of heating cables to pipes (temperature resistance 150 °C).	1	2832515	
SYFOK-P – fixation cables for nonstandard eaves, gutters and valleys. Material: frost-resistant plastic.	P/20 (20 m) P/10 (10 m)	2350012 2350013	
SPACING GRIP ; material: frost-resistant plastic, package contains 25 pcs. Maintains the spacing (approx 4.5 cm) of cables running in parallel.	1 package	2350014	
ROOF GRIP C , 25 pcs per pack. For the attachment of cables in roof valleys, atypical eaves, flat roofs – attachment via soldering/ riveting, glueing using 3M 46-11F acrylic tape.	CU TiZn	1 package 1 package	2350005 2350006

PRODUCT / Description	Q. ¹⁾	Cat. No.
REPAIR KIT		
KIT NO. 1 – for PV cable repair	1	5030121
KIT NO. 2 – for ADSV, ASL1P, PSV, CM Mat LD and LDTS cable repair	1	5030122
KIT NO. 3 – for MADPSP, MAPSV, MST, MDT and ADPSV cable and mat repair	1	5030123
KIT NO. 4 – for connection and termination of self-limiting cables	1	5030124
KIT NO. 5 – for MADPSP installed under asphalt	1	5030125
KIT NO. 6 – termination of PC/PC-S cables with linear wattage	1	5030126



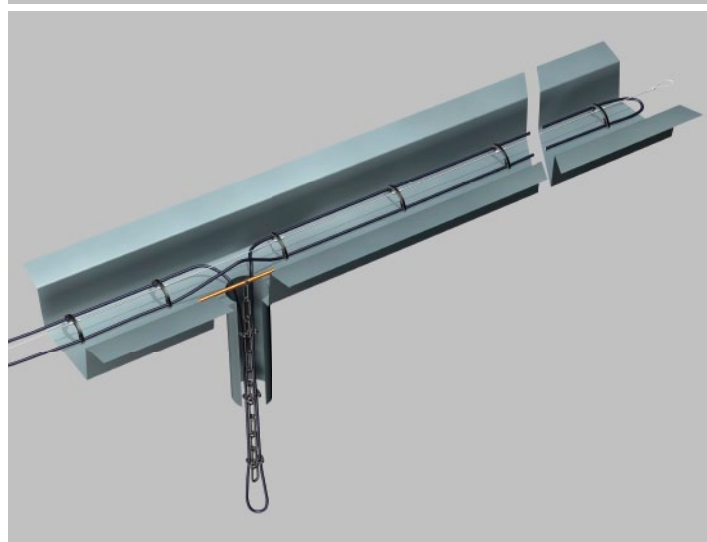


¹⁾ Quantity supplied

UNDERFLOOR HEATING
(living room, kitchen, bathroom, ...)



Where ECOFLOOR heating cable can be used?

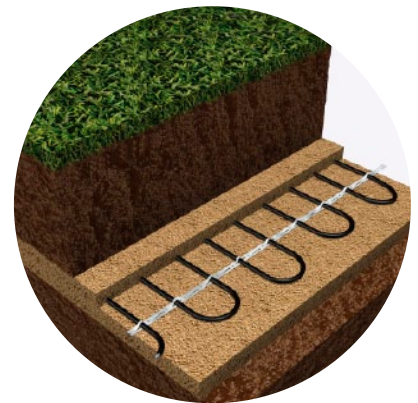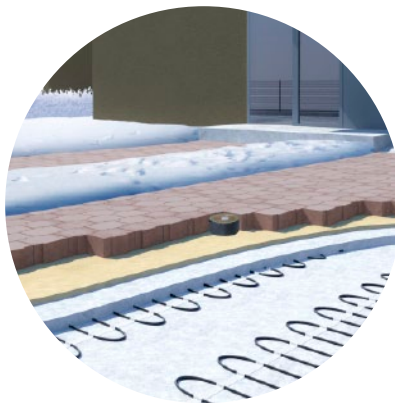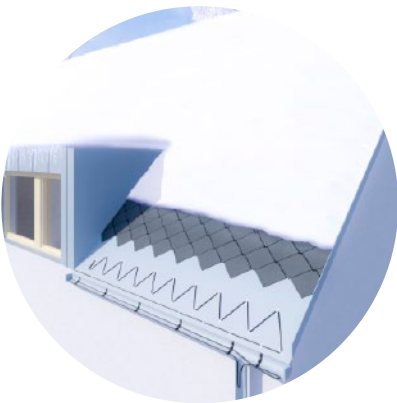

OUTDOOR APPLICATIONS
(de-icing gutters and eaves troughs; ice and snow melting – stairs, pavement, driveway; frost protection of pipes, ...)

SPECIAL APPLICATIONS
(football pitch and greenhouse heating, concrete curing, ...)

Presentation

Ecofilm heating films use state of the art technology and are primarily used for heating large surfaces. These heating systems are composed of laminated polyester films with a graphite coating, supply leads, and accessories. Ultra thin profile, long life span. We offer ECOFILM films in 3 versions: underfloor heating films ("F"), ceiling films ("C") and mirror heating films.

Underfloor heating films

Intended for use as floor heating for dry structures – directly beneath a floating, wooden floors. 10-year warranty.

► **PRODUCTS:** ECOFILM F, ECOFILM SET

Ceiling heating films


Provide an ideal ceiling heating system with balanced heat distribution throughout the room. Radiant heating system. 10-year warranty.

► **PRODUCTS:** ECOFILM C

Mirror heating films


ECOFILM MHF perfectly prevents mirror fogging.

► **PRODUCTS:** ECOFILM MHF

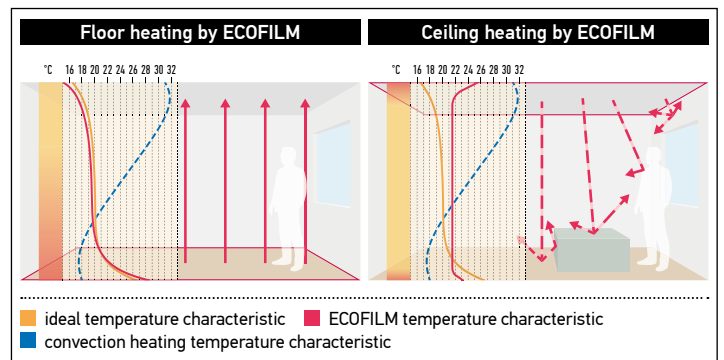

ECOFILM F / ECOFILM SET

- ➔ The F film is intended for use as floor heating for dry structures – directly beneath a floating, wooden floors.
- ➔ Due to its ultra thin profile (max 0.4 mm thick) the original construction height of the floating floor is hardly affected.
- ➔ This silent, unobtrusive and dry-laid underfoot heating system is highly reliable and has a long life span.
- ➔ We provide a 10-year warranty for ECOFILM heating films; however, their operational life can be longer (30–50 years).
- ➔ The product has been tested according to European standards.

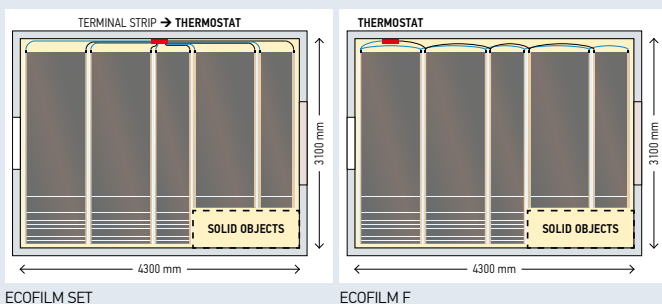


ECOFILM SET

UNDERFLOOR HEATING KIT

The do-it-yourself kit for underfloor heating may be installed easily and quickly by following the relevant instructions. No professional installation company required. The final electrical connection must be carried out by a qualified electrician. As the Ecofilm set comes complete for installation, no accessories are needed. We recommend 60 W/m² for a floating wooden floor and 80 W/m² for a floating laminated floor.

The Ecofilm set includes:

- Ecofilm F608/57 (F606/57, 1008) electrical heating film delivered in rolls of various lengths according to the customer's requirements and layout plan. The heating film is supplied with insulated cut edges and cold leads.
- An additional pair of insulation discs for insulating the copper electrodes of the heating film in the event that there is a requirement to shorten the length of the heating film.
- Installation manual.
- The film is fitted with two SK AV1.5 cold leads 3 mm in diameter and 5 m long.

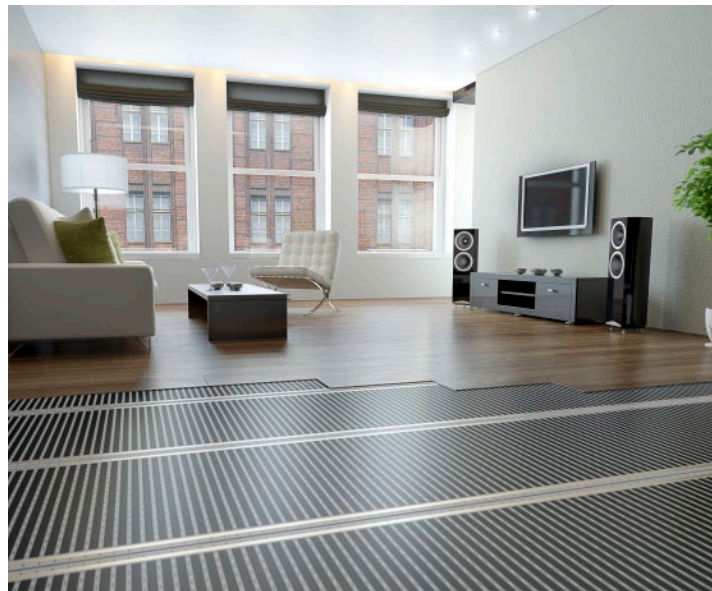

ECOFILM F, ECOFILM SET

ECOFILM F

UNDERFLOOR HEATING FILM

Flexible Ecofilm heating film is the ideal solution for economical electric underfloor heating for laminated and wooden floating floors. ECOFILM heating foils are intended for use as floor heating for dry structures. The product is ultrathin, yet robust, and is a dry-laid system that is easy to install.

Easy, precise and fast installation:

- The heating film is produced in rolls 600 mm wide (570 mm heating surface, two 25 mm non-heating edges) and 1 000 mm wide (970 mm heating surface, two 15 mm non-heating edges).
- Thanks to its special material composition, the heating film may be cut every 10 mm to obtain exactly the required length of strips. The strips are laid side-by-side across the entire heating surface and are interconnected in parallel using cables with connectors.
- ECOFILM F heating components must neither overlap nor cross one another.
- This method of laying the film saves time and especially reduces labor costs. Installers will appreciate that the floating or wooden floor may be laid immediately after the heating film is installed and connected.



TYPE	Output [W/m ²]	Width* [mm]	Length [m]	Total output [W]	Cat. No.
ES 60-0,6x 1,5m	60	600 (570)	1.5	51	6652495
ES 60-0,6x 2m			2	68	6652500
ES 60-0,6x 2,5m			2.5	86	6652503
ES 60-0,6x 3m			3	103	6652505
ES 60-0,6x 4m			4	137	6652510
ES 60-0,6x 5m			5	171	6652515
ES 60-0,6x 6m			6	205	6652520
ES 60-0,6x 8m			8	274	6652525
ES 60-0,6x 10m			10	342	6652530
ES 80-0,6x 1,5m			80	600 (570)	1.5
ES 80-0,6x 2m	2	92			6652540
ES 80-0,6x 2,5m	2.5	115			6652543
ES 80-0,6x 3m	3	138			6652545
ES 80-0,6x 4m	4	184			6652550
ES 80-0,6x 5m	5	230			6652555
ES 80-0,6x 6m	6	276			6652560
ES 80-0,6x 8m	8	368			6652565
ES 80-0,6x 10m	10	460			6652570
ES 80-1,0x 1,5m	80	1000 (970)			1.5
ES 80-1,0x 2m			2	156	6652710
ES 80-1,0x 2,5m			2.5	195	6652713
ES 80-1,0x 3m			3	234	6652715
ES 80-1,0x 4m			4	312	6652720
ES 80-1,0x 5m			5	390	6652725
ES 80-1,0x 6m			6	468	6652730
ES 80-1,0x 8m			8	624	6652735
ES 80-1,0x 10m			10	780	6652740

■ 230 V/50 Hz; * Width Total (Active) [mm]

TYPE	Width* [mm]	Output [W/m ²]	Output [W/m]	Cat. No.
ECOFILM F 608/57	600 (570)	80	44	6652306
ECOFILM F 606/57		60	33	6652305
ECOFILM F 604/57		40	22	6652304
ECOFILM F 1008	1000 (970)	80	78	6652310
ECOFILM F 1006		60	58	6652309
ECOFILM F 1004		40	39	6652308

■ 230 V/50 Hz; * Width Total (Active) [mm]

■ delivered as a roll; accessories required for installation must be ordered separately

GENTLE AND SAFE HEATING FOR YOUR COMFORT

Heating film makes an ideal floor heating system for laminated or wooden floating floors. The technical parameters of the heating film ensure that the materials' temperature resistance values are observed. Health and safety standards are also maintained as the maximum floor surface temperature is thermostatically limited to 27 °C. Traditional heaters, which utilise a liquid to transfer the heat, operate at (for example) significantly higher temperatures and result in a greater fluctuation in air humidity, and undesirable effects on wooden and laminated floors. It is hardly surprising that this sophisticated system has been used to safely and comfortably heat in excess of 2.5 million m² of floors throughout Europe and has been warmly endorsed by such leading floor manufacturers as PERGO, SCANDIFLOOR, ALLOC, KÄHRS and JUNCKERS.



ECOFILM C

CEILING HEATING FILM

ECOFILM C heating films provide an ideal ceiling heating system with balanced heat distribution throughout the room (without temperature gradients). Control of the ECOFILM C's temperature is achieved by the use of an electronic thermostat which controls the room temperature. As it is a radiant heating system, the same comfort level as achieved by convection heating may be obtained at lower temperatures. Generally, reducing the temperature by 1 °C lowers total heating costs by 6%.




ECOFILM C

TYPE	Width* [mm]	Output [W/m ²]	Output [W/m]	Cat. No.
ECOFILM C 420 (MK3)	400	200	60	6652103
ECOFILM C 414	(300)	140	42	6652202
ECOFILM C 520 (MK3)	500 (400)	200	80	6652211
ECOFILM C 514		140	56	6652220
ECOFILM C 510		100	40	6652225


■ 230 V/50 Hz; * Width Total (Active) [mm]

■ delivered as a roll; accessories required for installation must be ordered separately

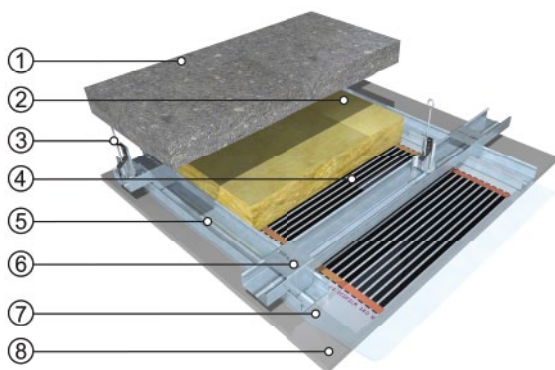

Sectional view of ceiling structure

- 1 supporting ceiling structure
- 2 thermal insulation
- 3 four-point spring (spring, wire) hangers
- 4 ECOFILM ceiling heating foil
- 5 mounting CD profiles in cross bond
- 6 supporting CD profiles
- 7 PE foil cover, 0.25 mm thick
- 8 plasterboard suspended ceiling (floating)

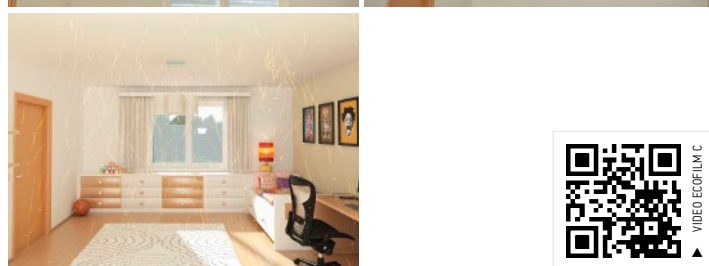

NEW

ECOFILM MODULE

CEILING HEATING SYSTEM

The system consists of both MH (Module Heating) heating modules fitted with ECOFILM foil and non-heating MB (Module Blank) modules. The non-heating modules are used to fill unheated parts and can be shortened and/or trimmed, unlike the heating modules. The modules are laid on the CD profiles of plasterboard and gypsum fibreboard ceilings. The supply cables of the heating modules, which are fitted with a plug, are simply connected to the backbone distribution system.




ECOFILM MODULES

TYPE	[W]	[V]	Packaging [pcs]	Cat. No.
MH 0512/65	65	230 V/50 Hz	4	6651102
MB 0512	non-heating module		5	6651105

■ Dimensions [mm]: 500×1200×50

BACKBONE CABLES

TYPE	Cable length [m]	Connected modules [max pcs]	Number of double sockets [pcs]	Cat. No.
Backbone cable 4	4.4	4	2	6651110
Backbone cable 6	5.6	6	3	6651112
Backbone cable 10	8	10	5	6651114
Backbone cable 14	10.4	14	7	6651116
Backbone cable 18	12.8	18	9	6651118
Backbone cable 22	15.2	22	11	6651120
Backbone cable 26	17.6	26	13	6651122
Backbone cable 30	20	30	15	6651124



ECOFILM MHF



MIRROR FOGGING PREVENTION

Mirror Heating Film perfectly prevents mirror fogging. The Ecofilm MHF film operates at low temperatures and prevents overheating or damage to the mirror. Installation is simple and fast. The MHF film has an adhesive layer (with release backing) that easily sticks to the rear of a mirror. The mirror heater can be wired into the electric circuit of a lighting fixture so that it is activated whenever the light is switched on. Due to its low input, the heating film's operating costs are negligible. ECOFILM MHF heating film requires no maintenance.



TYPE	[W]	Dimensions [mm]	Cat. No.
MHF 12	12.5	274×252	6651850
MHF 25	25	274×574	6651860
MHF 50	50	524×519	6651870
MHF 100	100	524×1004	6651880

■ 230 V/50 Hz; IP 44; class II; 1 m cold lead

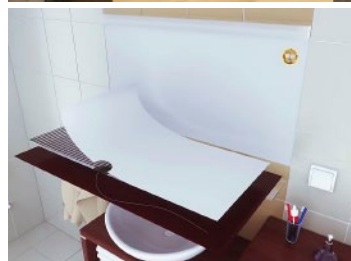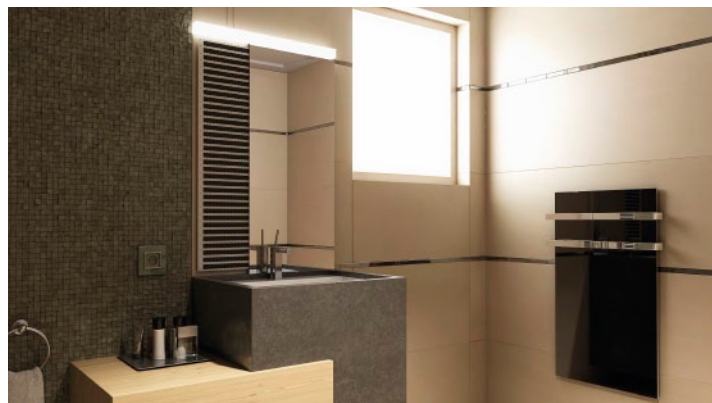

ECOFILM MHF

ECOFILM ACCESSORIES

Product / Description	Amount supplied	Cat. No.	
 Crimp connector for Ecofilm C and F	1 unit	6651001	
 Crimp cover for Ecofilm C	1 unit	6651002	
 Cold lead 1.5 for Ecofilm C	● BLACK	1 m	6651005
	● BLUE	1 m	6651004
 Cold lead AV 1.5 for Ecofilm F (halogen free)	● BROWN	1 m	6651040
	● BLUE	1 m	6651060
 Cold lead AV 2.5 for Ecofilm F (halogen free)	● BROWN	1 m	6651070
	● BLUE	1 m	6651080
 Crimp tool	1 unit	6651003	
 Insulating tape for sealing cut edges of heating film 38 mm width / 33 m length	1 roll	6651028	
 MASTIC VM connector insulation for Ecofilm F; 38 mm width (1 connector requires 0.1 m; 6 m in packing)	1 m	6651013	
 WAGO connector (terminal strip) for Ecofilm set. The number of wago connectors depends on the number of sets: up to 4 sets 2 pcs, 5–7 sets 4 pcs, 8–10 sets 6 pcs, 11–13 sets 8 pcs	1 unit	6651009	

► **HEAT-PAK** – for the placement of ECOFILM F, ECOFILM SET heating foil under a carpet or PVC. This underlay with good thermal conductivity enables the installation of floor heating directly under a carpet or PVC when it isn't possible to place the heating cable into screed (for example, in the case of additional installation or reconstruction work). Completely dry installation; raises the floor by only 10 mm. The packaging contains 8 boards (4×3 mm thick base boards and 4×4 mm thick covering boards); each of them is coated in a thin layer of adhesive. Laid in two layers, the boards are glued to each other (staggering of joints is necessary – in this way, the joints don't show through on the floor covering). A rigid, 7 mm thick compact construction is created onto which PVC or carpet can be laid (freely or glued). Sold only as whole packages.

TYPE	¹⁾ [mm]	²⁾ [kg/m ²]	³⁾ [W/mK]	⁴⁾ [kg/cm ²]	Dimensions [m]	⁵⁾ [m ²]	Cat. No.
HEAT-PAK 7	7 (3+4)	770	0.15	>40	boards 0.6×1.2	2.88	5442024

■ ¹⁾ Thickness; ²⁾ Density; ³⁾ Thermal conductivity coefficient; ⁴⁾ Strength in flexure; ⁵⁾ Package

► **STARLON / FLOOR INSULATION** under wood/laminate floor with ECOFILM F, ECOFILM SET heating foil


TYPE	¹⁾ [mm]	²⁾ [kg/m ²]	³⁾ [W/mK]	⁴⁾ [kg/cm ²]	Dimensions [m]	⁵⁾ [m ²]	Cat. No.
STARLON 3	3	40	0.0315	0.52	boards 0.5×1.0	5.0	5442032
STARLON 6	6	33	0.0298	0.67			5442034

■ ¹⁾ Thickness; ²⁾ Density; ³⁾ Thermal conductivity coefficient; ⁴⁾ Strength in flexure; ⁵⁾ Package

■ **WARNING:** before choosing insulation make sure that it is possible for the chosen covering to be laid on an XPS base with a thickness >3 mm.

► **PE FOIL**

TYPE	Thickness [mm]	Dimensions [m]	Package [m ²]	Cat. No.
PE foil 250 µm	0.25	1.2×10	12.0	6651030

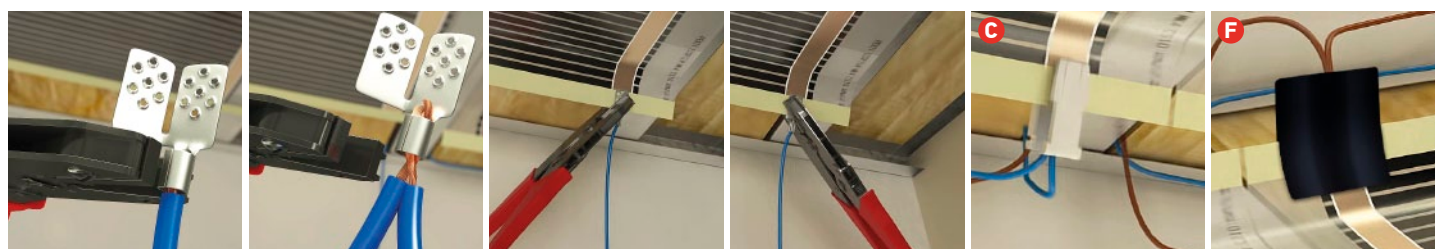


Installation: Crimp connector and cold lead

C ECOFILM C – installation of connector cover; F ECOFILM F – connection in parallel with Mastic

Presentation

The ULTRATHERM registered trademark originates from DEMISTA LTD., a Scottish company. The products which have been manufactured under this name in accordance with demanding European standards for more than 20 years rank among the most widely used vivarium heaters in the world. **Thanks to the principle of infrared radiation, they create conditions which are very close to the natural environment of the animals kept.** DEMISTA has been part of the FENIX holding group since 2008 and our range of standard heating systems has thus been extended to include this specific range of goods.

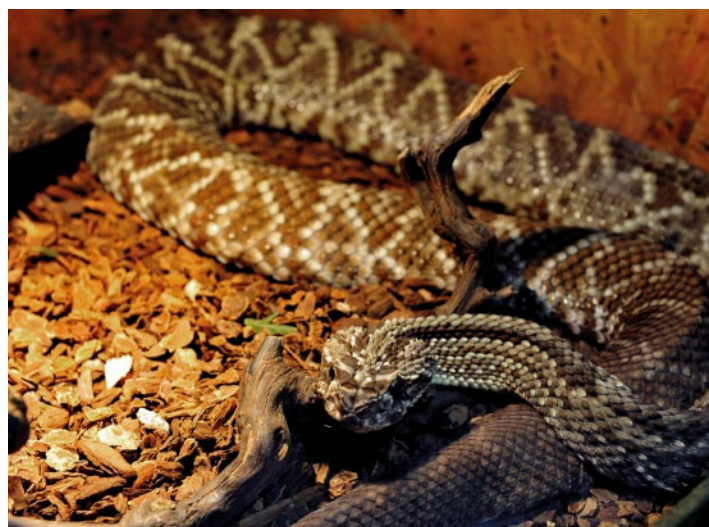

ULTRATHERM HEATING FILMS AND STRIPS

HEATING FILMS AND STRIPS


ULTRATHERM heating films and strips are also suitable as a 24 hour source of warmth, and they can be used under the bottom or outer walls of terrariums/vivariums.

Usually only part of the surface of the tank is covered so that the animal kept there can find a place where the temperature is ideal. The foils have a surface temperature of approx. 30–40 °C (depending on the ambient temperature) and differ from one another mainly in their length/width ratio (VIV STRIP / VIV MAT).

► **VIV STRIP / heating strips** – due to their size, Viv Strip heating strips are suitable mainly for the warming of selected areas within a vivarium or terrarium housing specific types of reptile.

► **VIV MAT / heating films** – are larger than Viv Strip strips and so are used when it is necessary to heat the majority of the area of a vivarium or terrarium.

► **HAPPY HAMSTER / heating films** – due to its dimensions this heating film is suitable for breeders of various types of rodent. Although rodents are not primarily heat-loving animals, in the winter season they enter a certain form of winter hibernation and Happy Hamster heating film is ideal to help them get through this period in comfort.

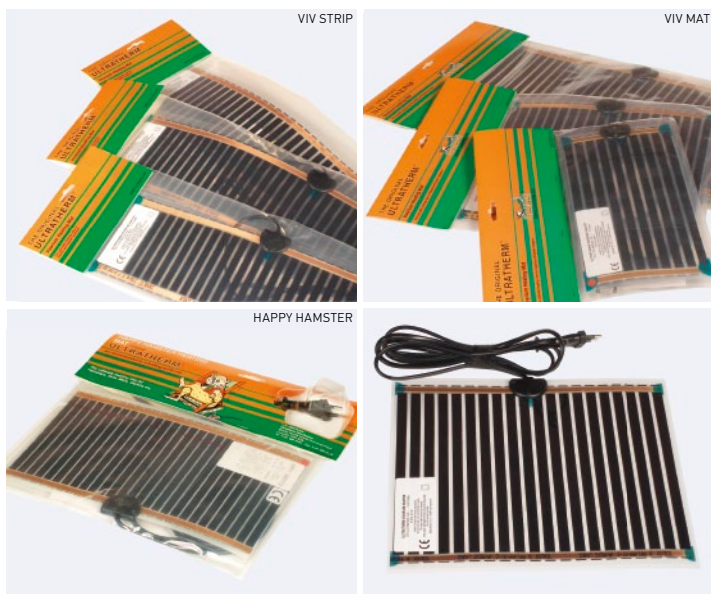

TYPE	[W]	Dimensions [mm]	Cat. No.
Ultratherm Viv Strip 11	11	150×410	8510051
Ultratherm Viv Strip 15	15	150×572	8510053
Ultratherm Viv Strip 23	23	150×868	8510055
Ultratherm Viv Strip 32	32	150×1188	8510057
Ultratherm Viv Mat 7	7	274×142	8510001
Ultratherm Viv Mat 15	15	274×276	8510003
Ultratherm Viv Mat 22	22	274×410	8510005
Ultratherm Viv Mat 30	30	274×572	8510007
Ultratherm Viv Mat 39	39	274×732	8510009
Ultratherm Viv Mat 46	46	274×868	8510011
Ultratherm Viv Mat 64	64	274×1188	8510013
Ultratherm Happy Hamster	8	178×280	8510071

■ 230 V / 50 Hz; Rating IP X4; Class II; Cold lead: 2 m

NOTIFICATION

ATTENTION – if the heating device is operated without supervision, the temperature has to be limited using a suitable thermostat with a probe placed in the centre of the heated surface! The temperature must not exceed that required by the individual species of animal kept in the tank, and 60 °C is the absolute maximum. If the foils are placed under the tank, it is important to ensure sufficient heat transfer takes place – be careful about e.g. the height and composition of the substrate at the bottom.

ULTRATHERM RADIANT PANELS

RADIANT PANELS


ULTRATHERM panels utilize the principle of infrared radiation and are primarily designed for the localized heating and warming of spaces used for animal rearing, large terrariums and dog pens.

The radiated heat does not warm the air but only the solid objects which it hits – i.e. the equipment of the vivarium, as well as the animals living there. This way of heating is very similar to that of normal solar radiation and therefore is the most similar to that found in the natural environment where the kept animals normally live.



► **ULTRATHERM / radiant heating panels** – equipped with a thermal fuse which protects the panel from overheating. It is possible to install them in a vertical position; for horizontal installation it is necessary to order ceiling fixing frames. The standard colour is brown; white versions can be ordered and other colours (see on page 5) are possible for an additional fee.

PANEL ULTRATHERM

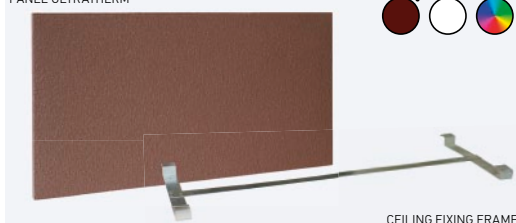

CEILING FIXING FRAME

TYPE	[W]	Dimensions [mm]	Weight netto [kg]	Qty on pallet	Cat. No.	CEILING FIXING FRAME	FOR	Cat. No.
Panel ULTRATHERM 100 h	100	500×320×30	2.1	60	8515010		100 h	5401230
Panel ULTRATHERM 200 h	200	750×320×30	3.1	45	8515015		200 h	5401231
Panel ULTRATHERM 270 h	270	1000×320×30	3.9	30	8515020		270 h	5401233
Panel ULTRATHERM 330 h	330	1250×320×30	5.4	30	8515025		330 h	5401232
Panel ULTRATHERM 400 h	400	1500×320×30	6.4	30	8515030		400 h	5401234


Accessories: ceiling fixing frame

- 230 V; IP 44; **Class I**; **Basic colour**: brown (RAL 8016); Other colours are available to order for an additional fee; **Connection cable**: 0.75 m for 100–270 W, 1.2 m for 330–400 W
- **Recommended installation**: vertical or horizontal position. The apertures used for hanging the ULTRATHERM panel are on the rear side of the panel. For the installation of a panel in a horizontal position it is necessary to order a ceiling fixing frame.

ULTRATHERM REGULATION

► **PLUG IN THERMOSTAT HT600** – programmable thermostat is equipped with an internal room temperature (air) sensor and features the option of connecting a cable probe (a 2 m long cable sensor with an IP66 rating is included with the product). Please note that the thermostat always reads only one temperature (via an internal sensor or a cable probe). Two temperatures can be set in the thermostat (comfort/attenuation) and it switches between them according to the selected programme. The programme can contain up to 23 temperature changes (every whole hour) and up to 7 programmes can be created (for the individual days of the week). The thermostat is intended for switching the following appliances on and off: radiant panels, ladder radiators, and heating films and ULTRATHERM panels for animal keepers.

Description	Cat. No.
Switching contact: 230 V / 16 A / 3600 W; optional sound signal when the set temperature interval is exceeded; programme backup in EEPROM memory (6 months); controlled temperature range: 0–60 °C, accuracy: ±0.5 °C; cooling function.	8520005

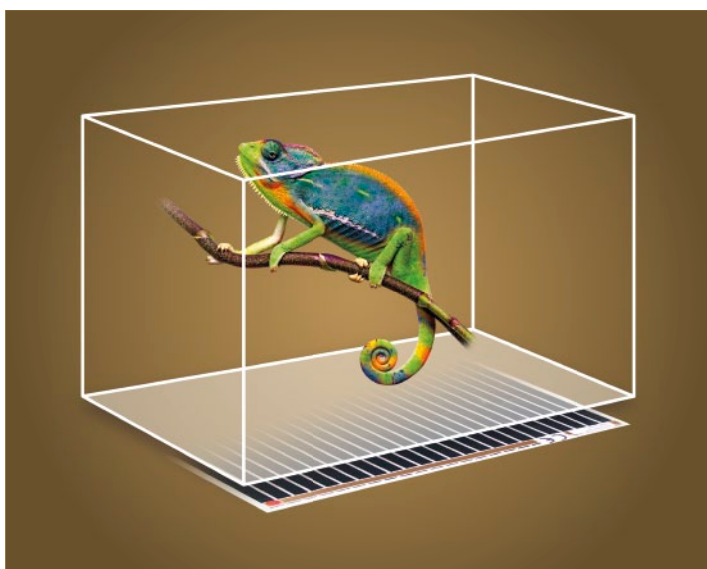

Presentation

In convection heating, a heating body is used to warm the air which then distributes – transfers – heat as it flows over the surfaces of the objects to be heated. Most electrical convector heaters that our firm distributes come with a precise electronic thermostat as standard, with a contact variation of +0.5 °C.

Direct-heating convection heaters

Simple, undemanding heaters which have zero maintenance requirements and are easy to install. Exceptional operating parameters can be attained thanks to the use of precise electronic thermostats. FENIX ECOFLEX convection heaters are among the few such units that can be controlled via a pilot wire.

► **PRODUCTS:** ECOFLEX TAC, ATLANTIC F129-D, CH 2000 B TURBO

Radiant convection heaters

These products combine within themselves the advantages of two different systems – infrared radiant heating (radiant heat, more economical operation, even distribution of temperatures, pleasant microclimate) and convection heating (excellent dynamics, advantageous price/performance ratio). Radiant convection heaters can also eliminate, to a large degree, the so-called “cold floor” effect thanks to the radiation of heat and are therefore suitable mainly for flats, schools and offices.

► **PRODUCTS:** SOLIUS II.



ATLANTIC F129-D / F129-D



SOLIUS II.

NEW

► **SOLIUS II.** – radiant convector with a programmable thermostat. This product is only suitable for well insulated rooms or occasional use – mainly for the heating of apartments and homes, doctor's surgeries, offices, schools, etc.



TYPE	[W]	Dimensions [mm]	Weight netto [kg]	Qty on pallet	Cat. No.
SOLIUS II. – 07	750	527×477×129	5.2	20	5435122
SOLIUS II. – 10	1000	601×477×129	5.8	16	5435123
SOLIUS II. – 15	1500	823×477×129	7.8	13	5435124
SOLIUS II. – 20	2000	1045×477×129	9.2	11	5435125
Supports for SOLIUS II. – this set of mobile supports transforms your convector heater into a portable heater.					5412128

■ **Needed clearance:** bottom edge 15 cm / side and top edge 10 cm / front side 100 cm; Option of installation on a type C or D combustible base
 ■ 230V/50 Hz; **Rating** IP 24; **Class** II.; **Colour:** white casing (RAL 9016)

► **ATLANTIC F125-D** – convector with programmable thermostat (accuracy 0.1°C) with four operating modes: COMFORT, ECO, PROG and TIMER. Other functions: temperature calibration ± 3 °C, control lock, open window detection.

TYPE	[W]	Dimensions [mm]	Weight netto [kg]	Qty on pallet	Cat. No.
ATLANTIC F125-D 05	500	391×461×114	3.1	26	5412174
ATLANTIC F125-D 10	1000	465×461×114	3.7	24	5412176
ATLANTIC F125-D 15	1500	613×461×114	4.6	18	5412178
ATLANTIC F125-D 20	2000	761×461×114	5.5	13	5412180
ATLANTIC F125-D 25	2500	910×461×114	6.8	12	5412182

■ 230 V/50 Hz; **Rating** IP 24; **Class** II.; **Colour:** white (RAL 9016) with white grid; **Needed clearance:** bottom edge 12 cm / top edge 12 cm / front side 15 cm

► **ECOFLEX TAC** – electric convector with electronic thermostat and pilot wire. This product is only suitable for well-insulated rooms or occasional use – mainly for the heating of apartments and homes, doctor's surgeries, offices, schools, etc. 3–4 °C setback control.

TYPE	[W]	Dimensions [mm]	Weight netto [kg]	Qty on pallet	Cat. No.
ECOFLEX TAC 05	500	369×451×78	3.4	44	5415330
ECOFLEX TAC 07	750	369×451×78	3.5	44	5415332
ECOFLEX TAC 10	1000	443×451×78	4	34	5415334
ECOFLEX TAC 15	1500	591×451×78	5.4	24	5415338
ECOFLEX TAC 20	2000	739×451×78	6.7	18	5415342

■ **Needed clearance:** bottom edge 15 cm / top edge 15 cm / front side 15 cm; Can be installed on C and D flammable surfaces

■ 230 V/50 Hz; **Rating** IP 24; **Class** II.; **Colour:** white (RAL 9016) with white grid

► **CH 2000 B TURBO** – portable convector with electromechanical thermostat. This product is only suitable for occasional use.

TYPE	[W]	Dimensions [mm]	Weight netto [kg]	Qty on pallet	Cat. No.
CH 2000 B TURBO	750/ 1250/ 2000	580×375×110	4.8	20	5410010

■ 230 V/50 Hz; **Rating** IP 20; **Class** I.; **Colour:** white; **Needed clearance:** bottom edge 5 cm / top edge 10 cm / front side 5 cm

■ Obligatory information according to EU Regulation 1188/2015: This product is only suitable for well insulated spaces or occasional use.

RECOMMENDED ERP REGULATION FOR ELECTRIC CONVECTORS WITH PILOT WIRE (ECOFLEX TAC)

BMR HC64 – control unit

Cat. No. 4200190

A control unit for the HC 64 system with a WEB interface, TCP, and USB connectivity. Power supply 24 VDC / 2.5 A; control software for PC, USB cable.

The control unit is designed to be used to control warm-water systems (in combination with other components). If connected to HTS64DIN_R modules, it can also be used to control electric heaters that are fitted with a pilot wire. One HC64SZ control unit can control up to 32 HTS64-DIN_R modules (32 zones).

BMR SZ 244001 – power supply

Cat. No. 4200267

A power supply for the BMR HC64 control unit.



BMR HC64
control unit



BMR SZ 244001
power supply

BMR HTS 64-DIN_R

Cat. No. 4200253

If a building is heated by heaters (convection heaters) fitted with a pilot wire, their operation can be controlled by signals sent via the pilot wires using a BMR HC64SZ control unit and BMR HTS64-DIN_R modules.

Convection heaters with a pilot wire have a built-in thermostat with which the user sets the comfort temperature they require in a given room. As soon as the heater receives a signal via the pilot wire, it automatically (without any action being required from the user) starts to maintain the attenuation (lowered) temperature in the room. This is usually 4 °C lower than the comfort temperature. A subse-

quent signal acquired via the pilot wire will return the heater back to the comfort temperature. Each signal arriving via the pilot wire switches the heater between these two temperatures.

The signals themselves are sent by the HTS64-DIN_R module, which must be subordinate to the HC64SZ control unit, whose 1-week programme sets when the room should be heated to either the comfort or the attenuation temperature. If there are more rooms in the building which should have different "comfort/attenuation" time modes (a new zone), another HTS64-DIN_R must be installed. The building can thus be

divided into individual zones with their own 1-week programmes as needed. One HC64SZ control unit can control up to 32 HTS64-DIN_R (32 zones).






THERMOSTATS AND CONTROLS

TYPE	Description	Cat. No.
------	-------------	----------

DIGITAL PROGRAMMING THERMOSTATS

NEW

FENIX TFT WIFI 	Integrated Wi-Fi module for connection to a home network, remote control via a cloud server (iOS / Android application), colour touch screen. User-selectable temperature scanning – room only, floor only, or both values, PWM regulation or fixed temperature difference. Week programme – 4 preset programmes, 3 user programmes (up to 10 temperature changes per day), holiday mode, manual control, anti-freeze protection and complete shutdown available. Display lock, operating hour counter, open window function, sensor calibration option. 3 m floor probe included with the product. For attachment to a KU 68 wiring box.	White	4200143	
		Black	4200142	
FENIX TFT 	Digital touch screen thermostat; option of selecting the background colour. Operating modes 'floor only', 'room only', 'floor+room'; option of measurement with the help of two external (floor) probes, PWM (PID) regulation or fixed temperature difference. 4 preset and 3 user programmes (10 temperature changes in 15 minute steps, with the shortest time period being 1 hour). Modes: according to the programme, manual mode, holiday, party, non-freezing temperature, switched off. 16 A switching contact; range of temperature settings 5–35 °C in 0.5 °C steps; option of setting the min. and max. floor temperature; calibration of sensors. A floor probe 3 m is included with the thermostat. IP 21 rating.		4200152	
FENIX TFT-2 	Colour touch screen (optional background colour); the outer white cover is composed of two exchangeable parts (frame/cover) which enable the colour of the thermostat to be changed. Reads the temperature of the room, the floor or both values simultaneously; "intelligent start" function. Weekly programmes – 4 predefined, 3 user-determined (up to 10 temperature changes per day). Other modes: holiday, manual control, antifreeze protection, complete shutdown. Counting of operating hours, "open window" function, occupancy sensor. 16A switching contact; IP 21 rating; 3m floor probe included with the product. Placement on KU 68, programme backup using a high capacitance capacitor.		4200156	
		Coloured front cover for the TFT2 thermostat	Silver	4200157
			Black	4200158
			Red	4200159
		Coloured body frame for the TFT2 thermostat	Silver	4200160
			Black	4200161
	Red	4200162		
EBERLE FIT 3U	Programmable thermostat with PWM regulation or fixed temperature difference. Operating modes "floor only", "room only", "floor + room". 13 programmes – 9 pre-set, 4 for users (4 temperature changes per day in 30 minute steps), holiday operation, permanent temperature or permanent attenuation modes. Temperature settable from 5–37°C in 0.5 °C steps (floor and room). Option to set the max. and min. floor temperature. 16 A, 230 V, IP 30. Floor probe is part of the package		4065005	
VTM 3000	Selection of weekly or daily programme, selection of the modes "floor only", "room only", "floor + room". 6× daily switching between the pre-set comfort and attenuation temperatures. Option to manually change the temperature with an automatic return to the programme. Data and programme back-up in the EEPROM memory (upto 10 years), 16 A / 230 V, max. switched wattage 2 kW, IP 31. Floor probe part of the package.		4200134	


ANALOG THERMOSTATS

EBERLE RTR-E 3521	Bimetal thermostat with thermal feedback and high precision. Possibility of surface mounting or directly on the installation box, with fixing holes also on a DIN rail. Well arranged terminal block allows easy connection. The thermostat reads only room temperature and cannot be connected to a cable probe, so it is not suitable for floor heating. 16 A, 230 V AC 50/60 Hz, IP 30, 5–30 °C, colour RAL 9010.	4066018
EBERLE RTR-E 6124	10 A, with temperature setback 5 K, accuracy 0.5 K, 5–30 °C, IP 30.	4066020
FENIX-THERM 105	Analogue electronic thermostat with operation modes "floor only", "room only", "floor+room". 16 A, IP 21, 230 V, heat differential of 0.3 °C, switch, 10–45 °C floor and ambient air. Can handle an overvoltage of 2,500 VAC.	4200122
T-SENSE (BLUETOOTH)	Mobile application ecoControl (available for Android and iOS) can be connected to thermostat T-Sense using Bluetooth. Thermostat does not need this application for standard operation, it is intended for modification of parameters pre-set at the production (temperature value ECO, lighting intensity LED, calibration of temperature sensors) and/or setting and starting of the thermostat in advanced mode (weekly program). 16 A / 2.5 kW; 230 V / 50 Hz; IP 21; 5...35 °C	4200121

NEW



TYPE	Description	Cat. No.
WIRELESS REGULATION WATTS		
V22	Wireless room thermostat with 1-week programming – intended for the control of electric heating (floor or ceiling heating, radiant panels, convection heaters) which it switches on/off via V23/25 receivers (max. 4 per V22 unit, only one of which is furnished with a floor probe). Parameters: operating modes Comfort, ECO, Stop, Anti-freeze protection, Holiday, 1-Week programme – interval for setting 30 min. Placement on a wall or independently on a stand (power supply: 2x AAA), programme back-up in EEPROM memory (10 years), 868 MHz bidirectional wireless communication, display of set/real temperature, reading of room temperature with an internal or cable sensor (both sensors cannot be used simultaneously; the cable probe is not included). The thermostat is also designed for a wireless central regulation system with the V24 control unit (modular system, can be retrofitted) – when connected in this way it reads the room temperature for the V24 control unit and enables temporary changes to be made.	4500410
V23	Wireless receiver with optional floor probe connection – normally controlled by the V22 thermostat, it switches the connected heating on/off and can also optionally read the floor temperature using a floor probe (not included). It passes on floor temperature information to the V22 thermostat. Parameters: placement on a KU 68 wiring box, 16 A switching contact, 230V/50Hz, IP21 rating, terminals for floor probe connection, LED indicates operational status. When connected to the central regulation system it is controlled directly by the V24 control unit, which conveys floor temperature information (if a floor probe is connected). The cable probe is not included.	4500413
V24 CENTRAL UNIT	The V24 control unit is a superstructural element of Watts wireless regulation (V22 thermostats, 23/25 receivers). It enables central control of a heating system – i.e. the programming and control of heating throughout a whole building from one location – and is intended for all types of electric direct-heating systems (floor as well as ceiling heating, radiant panels, convection heaters, ladder radiators, etc.) The unit is fitted with a touch screen with a simple graphic interface which enables easy and intuitive control. The power supply is drawn from a 230V/50Hz mains voltage connection (placed in a wiring box); however, the V24 unit communicates with other parts of the regulation system wirelessly. One of the advantages is the modular system; a V24 central control unit can be added to a wireless system some time after that system was installed, or vice versa – other regulation units (V 22/23/25) can be added to a system where a V24 unit has already been installed. The V24 central unit can control up to 24 rooms/zones, and an individual programme mode can be created for each zone. A Watts V27 GSM module can also be connected to the V24 unit, enabling basic control of the heating system via short text messages.	4500408
V24-WIFI CENTRAL UNIT	The V24-WiFi central unit enables the wireless central control of heating systems like the V24. The functions and intuitive, simple controls have remained, while a large display provides comfort and an easy overview of individual parameters and information about temperatures, the current status and individual zones (rooms). It's possible for users to upgrade the unit's software with the help of a Micro SD card. The central unit's Wi-Fi connection simplifies and extends the options for the remote monitoring and control of your heating system via an internet browser or mobile application (Android, iOS). The unit can be powered via a 230 V / 50 Hz power supply (placed in the junction box) or via a USB cable (optional).	4500409
V25	Wireless plug socket receiver – normally controlled by the V22 thermostat, it switches appliances on/off that are fitted with a plug (heating ladders, portable heaters). It does not read temperatures or enable the connection of an external sensor. Parameters: 16 A switching contact, 230V/50Hz, IP20 rating, operational status indicated by LED. When connected to the central regulation system it is controlled directly by the V24 control unit. If there is no room temperature sensor in the room (e.g. a V22 thermostat), it only works in the ON/OFF mode. The V25 wireless plug socket receiver is intended only for use with appliances supplied by Fenix Trading s.r.o. and for appliances with Schuko and Uni-Schuko plugs.	4500416
GSM MODULE V27	The Watts V27 module enables basic control of a whole Watts central regulation system via connection to a V24 central unit. It is possible to find out current temperatures, implement temporary changes in temperature (valid until the next programme change) or change the mode of a zone completely (Auto/Manual/Non-freezing) in a selected zone (or in all of them at once) via short text messages. It is also possible to start or prematurely end the Holiday mode. Also, the V24 control unit can send information in the opposite direction about the status of individual zones or about possible error reports. The GSM module has a slot for a SIM card (not included with the product), and it can be attached to the V24 unit either via a cable or wirelessly, which allows its placement in areas with a good signal from the GSM network. The V27 module itself is powered via a network adapter. WARNING: the module can only be connected to a Watts V24 unit.	4500422
FLOOR PROBE	This floor probe is designed to read floor temperatures; however, it can also be used to read air temperatures. Parameters: length 3 m, cable diameter 4 mm (thermistor Ø 6 mm), PVC sheath, resistance 10 kΩ at 25°C, suitable for Watts V23 receivers or Watts V22, Fenix TFT or Watts 760/860 thermostats.	4200129
WS-1 REGULATION SET	The WS-1 regulation set is intended for the wireless control of electric heating – floor, ceiling, radiant panels, convectors and ladder radiators. It is particularly suitable for supplementary heating installations – it isn't necessary to connect the thermostat to the receiver using wires. The set contains 1 V22 room thermostat with a 1-week program and 1 V23 wall-mounted receiver (see the individual elements for their technical description). The set can be extended to include three further Watts V23/V25 receivers (other switched heaters) and they can be linked via the wireless central regulation system to the V24 control unit (modular system). The cable probe is not included.	4500419

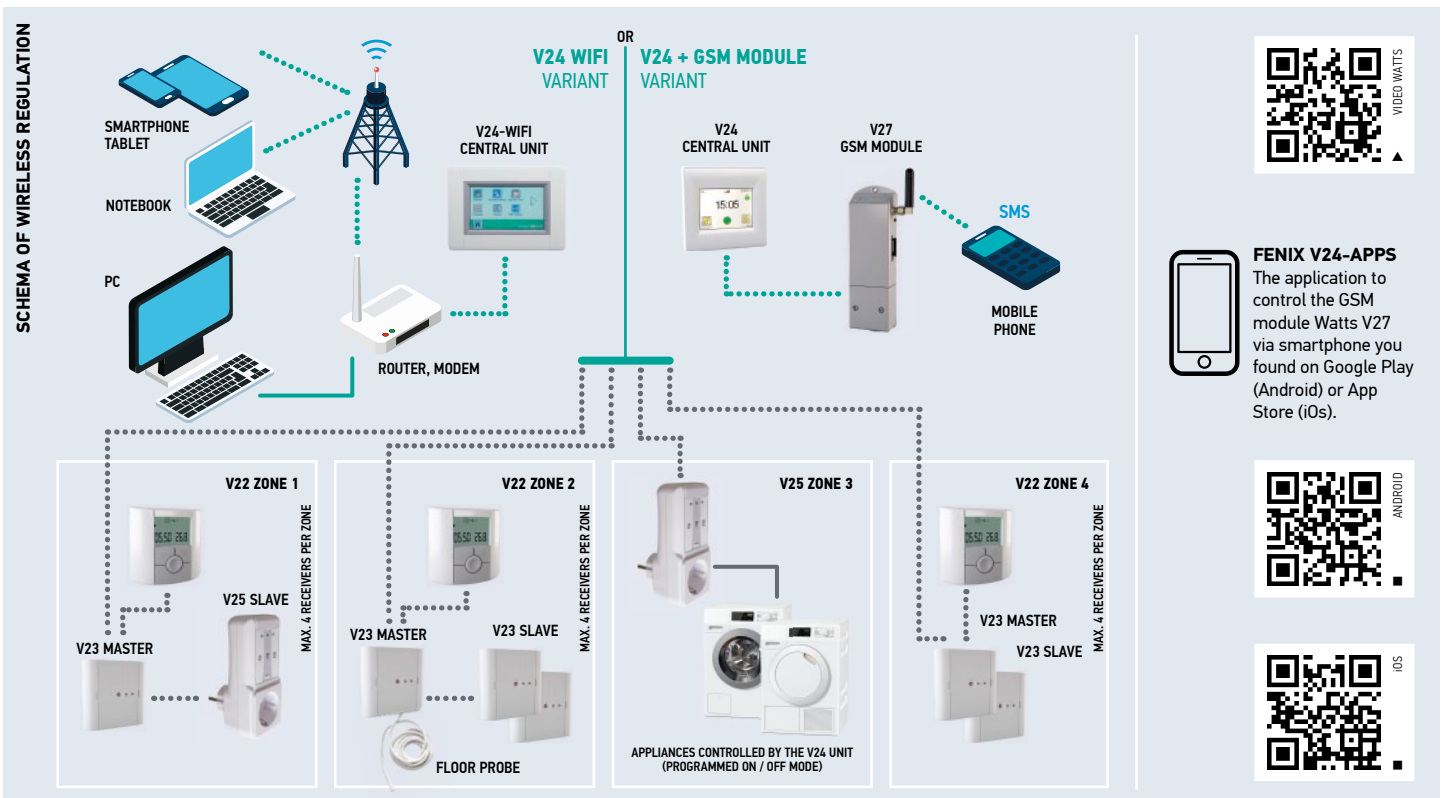

TYPE	Description	Cat. No.
INDUSTRIAL ROOM THERMOSTAT – analog wall-mounted thermostats with increased protection (IP 54)		
EBERLE AZT - A 524510	Built-in space sensor and exterior scale. Ambient air sensor 5–35 °C, 10 A, accuracy 1–5 K.	4066010
EBERLE AZT - A 524410	Built-in space sensor and exterior scale. Ambient air sensor –15–15 °C, 10 A, accuracy 1–5 K.	4066005
EBERLE AZT - I - 524510	Built-in space sensor and interior scale. Ambient air sensor 5–35 °C, 10 A, accuracy 1–5 K.	4066012
EBERLE AZT - I - 524410	Built-in space sensor and interior scale. Ambient air sensor –15–15 °C, 10 A, accuracy 1–5 K.	4066007

INDUSTRIAL THERMOSTATS WITH SEPARATE SENSOR

EBERLE UTR/60	16 A, exterior/interior control, temperature range 0–60 °C, 230 V, 1 switch, IP 65.	4066037
<i>EBERLE sensors combinable with UTR thermostats</i>		
F 891 000	– 4 m cable sensor; PVC sheath; IP 67; range –25...70 °C	4066137
F 892 002	– 1.5 m cable surface-mounted sensor; silicon sheath; IP 67; range –40...120 °C	4066138
F 893 002	– 1.5 m air temperature cable sensor; silicon sheath; IP 30; range –40...100 °C	4066139
F 897 001	– outdoor air temperature sensor; IP 65; range –40...80 °C	4066140
EB-THERM 800	Digital thermostat with an LCD display for mounting on a DIN rail (2 modules) – 1×16 A switching contact, option of connecting a second temperature sensor (room or floor), operating hours counter, programmable (1-week programme), ventilation function (open window), settable hysteresis, option of connecting an alarm for when set temperatures are exceeded. Universal use – heating control in standard rooms (including floor heating), cooling control, use in industrial or outdoor applications, differential thermostat function. Contents of packaging: EB 800 thermostat, E 85 816 71 cable sensor (3 m; range –15°C to +75°C); installation manual.	4200170
LT probe for EB-Therm 800	– LT (low temperature) cable sensor for the EB-Therm 800 thermostat for the reading of temperatures within the range of –15°C to 75°C (PVC sheath, length 3 m – can be extended to up to 50 m using a 2×1.5 conductor). Please note – the LT probe is standardly supplied with the EB-Therm 800 thermostat.	4200171
HT probe for EB-Therm 800	– HT (high temperature) cable sensor for the EB-Therm 800 thermostat for the reading of temperatures within the range of 60°C to 170°C (silicone sheath, length 3 m – can be extended to max. 50m using a 2×1.5 conductor)	4200172
Room sensor for EB-Therm 800	– Room sensor for the EB-Therm 800 thermostat for the reading of air temperature. The sensor is connected to the thermostat using a 2×1.5 conductor – max. 50 m. The thermistor inside the sensor is placed in a designated area which is covered by a sealed cover – the sensor rating is IP54. The cover can be removed – the sensor will react to temperature changes faster and more accurately but the rating will be decreased to IP20.	4200173

REGULATORS TO CONTROL ATTENUATION AND TIME PROGRAMMABLE SWITCHES

DELTADORE DRIVER 620	Two-zone attenuation regulator for appliances with pilot wires. This attenuation regulator is intended for use with appliances with pilot wires (convection heaters) or with analogue thermostats featuring an attenuation function. With the aid of the pilot wire it sends a signal to switch between comfort and attenuation temperature. The comfort temperature is the value set on the heater (analogue thermostat), while the attenuation temperature is around 3.5°C lower (the size of the drop is permanently set in the heater/thermostat by the manufacturer and ranges between approx. 3.5°C and 5°C). The DRIVER 620 enables a building to be divided into two zones, each of which can have its own separate 1-week or 1-day programme. Technical parameters: dimensions 104×80×35 mm; power supply 230 V; programme backup 2 hours; rating IP 30; insulation class II; placement on KU 68; output 2×0.1 A/230 V	4100020
-----------------------------	---	---------

REGULATORS FOR REDUCTION OF MAIN CIRCUIT BREAKER VALUE

BMR HJ 103 RX	Three-phase current load balancer, disconnection of all three phases at one time (one control channel), three-stage, mounted on DIN rail (6 modules).	4200033
BMR HJ 306 RX	Three-phase current load balancer, single phase disconnection (3 control channels), two-stage, mounted on DIN rail (6 modules).	4200034



EBERLE AZT - A



EBERLE AZT - I



EBERLE UTR/60



EB-THERM 800



DELTADORE DRIVER 620



BMR HJ 103 RX



BMR HJ 306 RX

TYPE	Description	Cat. No.
CONTROLLERS FOR GUTTERING AND OUTSIDE SURFACE HEATING		
EBERLE EM 524 89 (ONE-ZONE)	Regulator for the heating of eaves troughs, downpipes and outdoor surfaces – pavements and drives. In contrast with a manual or thermostatic controller it enables the achievement of operating cost savings of up to 80 %. Functions: setting of temperature and humidity, operating hours counter, alarm output, delayed switching off, current temperature indicator. Placement on a DIN strip (8 modules), CZ menu. The presence of humidity (water, snow or ice) and the outdoor temperature are monitored with the help of external sensors which need to be ordered separately – for eaves troughs or free areas, depending on the application. IP 20.	4600015
EBERLE EM 524 90 (TWO-ZONE)	A two-zone regulator for the heating of eaves troughs, downpipes and outdoor surfaces. The parameters and functions are the same as for the EM 524 89. However, the regulator enables independent monitoring and control of two applications simultaneously. Basically, these are two EM 524 89 regulators in one. Both zones require the connection of their own set of sensors – for eaves troughs or free areas, depending on the application – and these need to be ordered separately. IP 20.	4600016
SET OF EBERLE SENSORS FOR EAVES TROUGHES	Humidity (ESD 524 003) and temperature (TFD 524 004) sensor for EM 524 89 and EM 524 90 regulators for controlling the heating of eaves troughs and downpipes. IP 65.	4600051
SET OF EBERLE GROUND SENSORS	Humidity (ESF 524 001) and temperature (TFF 524 002) sensor for EM 524 89 and EM 524 90 regulators for controlling the heating of outdoor surfaces. IP 65.	4600050
EBERLE DTR-E 3102	Differential thermostat, 230 V, 1 × switching off / 1 × switching contact 16 A, 20–35 °C, IP 65 (can be placed e.g. on the facade). While being operated it requires careful monitoring to attain economical operation.	4066038
EB-THERM 800	For details see above – Industrial thermostats with separate sensor	4200170
NEW ET02-4550	The regulator allows independent control of two circuits of frost protection. Thanks to that heating of pavement and roof gutter/pipes or frost protection of northern and southern parts of the roof can be controlled concurrently by one regulator. The regulator allows even two-grade control of performance or control of hot water systems of frost protection. Both circuits must have its own humidity sensors (ETOR-55 for roof and ETOG-55 for ground applications), temperature sensor ETF-744/99 (it is shared for both zones) must be connected in roof gutter protection, humidity-temperature sensor ETOG-55 senses temperature for ground applications, or, as well as in roof protection, shared temperature sensor ETF-744/99 can be used. Temperature sensor is placed into the "coldest" point of application (northern side of the building or non-sunward point). Sensors are not a part of the regulator, they are ordered according to the type of application. Regulator ET02-4550 is placed into the switchboard onto DIN rail (9 modules). 230 V; IP 20; 2×16 A	4200020
NEW ETR2-1550	Single-zone regulator of frost protection of pavements and entrances or roof gutters and pipes. Relevant humidity sensor (ETOR-55 for roof or ETOG-55 for ground applications) needs to be used according to the type of application, temperature sensor ETF-744/99 must be connected in roof applications, humidity-temperature sensor ETOG-55 senses temperature for ground applications or temperature sensor ETF-744/99, as well as in roof protection, can be used. Temperature sensor is placed into the "coldest" point of application (northern side of the building or non-sunward place). Sensors are not a part of the regulator, they are ordered according to the type of application. 230 V; IP 20; 16 A	4200022
NEW ETOG-55 GROUND SENSOR	Humidity-temperature sensor ETOG-55 senses humidity (water, snow, ice) and temperature for regulators ET02-4550 and ETR2-1550. The sensor is always placed into heated area, among heating cable loops, if possible, to the lowest point where water runs down. 24 V; IP 68	4200026
NEW ETOR-55 GUTTER SENSOR	Sensor ETOR-55 is intended for sensing of humidity (water, snow, ice) for regulators ET02-4550 and ETR2-1550. In the place of application it is usually placed into the lowest point of roof gutter/drains, between heating conductors. 24 V; IP 68	4200028
NEW ETF-744/99 TEMPERATURE SENSOR	Wall sensor ETF-744/99 is intended for sensing of air temperature for regulators ET02-4550 and ETR2-1550. The sensor is intended directly for outdoor environment, with installation into places where free circulation of air is ensured. It is usually placed onto facade in the "coldest" point of application (northern side). IP 54; -20...70 °C; 12 kΩ; 25 °C	4200030



EBERLE EM 524 89



EBERLE EM 524 90



SET OF EBERLE SENSORS FOR EAVES TROUGHES



SET OF EBERLE GROUND SENSORS



EB-THERM 800



ET02-4550



ETR2-1550



ETOG-55 GROUND SENSOR



ETOR-55 GUTTER SENSOR



ETF-744/99 TEMPERATURE SENSOR

SUPPLEMENTARY PRODUCTS

► **HAND DRYERS** – electrical contactless hand dryers intended for fixed installation onto wall. The **ZY-203A** type is equipped with one-speed centrifugal fan, therefore it is suitable into less exposed places (office buildings, schools). **JET HAND DRYER 300**, a high-performance jet hand dryer, is intended for exposed places (shopping centres, petrol stations, cinemas, theatres, etc.).

TYPE	Jet Hand Dryer 300 (plastic)	ZY - 203 A (plastic)
[W]	1880	1800
Switching sensor	–	14–18 cm
Air temperature	–	50–70°C
Dimensions [mm]	296×566×164	240×240×240
Weight netto [kg]	6.5	2.7
Rating	IP X4	IP 21
Cat. No.	5440012	5440010



■ 230V/50 Hz; **Colour:** white



► **TUBULAR HEATING ELEMENTS** – with an electric heating insert. Intended primarily for bathrooms – suitable for drying bath towels, hand towels, etc. Filled with non-freezing mixture, 1 m coiled connection cable (extends to 3.5 m) with plug. Mounting brackets are included with the product. The heating element is without a thermostat

TYPE	[W]	Width [mm]	Height [mm]	Depth [mm]	Weight netto [kg]	Cat. No.	
KD-E (flat)	KD-E 450×960	300	450	960	90	10.5	5441402
	KD-E-600×960	400	600	960	90	13.0	5441404
	KD-E-450×1320	400	450	1320	90	14.9	5441406
	KD-E-600×1320	600	600	1320	90	17.3	5441408
	KD-E-750×1680	900	750	1680	90	26.4	5441410
KDO-E (rounded)	KDO-E 450×960	300	450	960	120	11.5	5441412
	KDO-E 600×960	400	600	960	120	13.8	5441414
	KDO-E 450×1320	400	450	1320	120	15.8	5441416
	KDO-E 600×1320	600	600	1320	120	18.3	5441418
	KDO-E 750×1680	900	750	1680	120	27.7	5441420

■ 230V/50 Hz; **Rating** IP 65; **Colour:** white (RAL 9016)

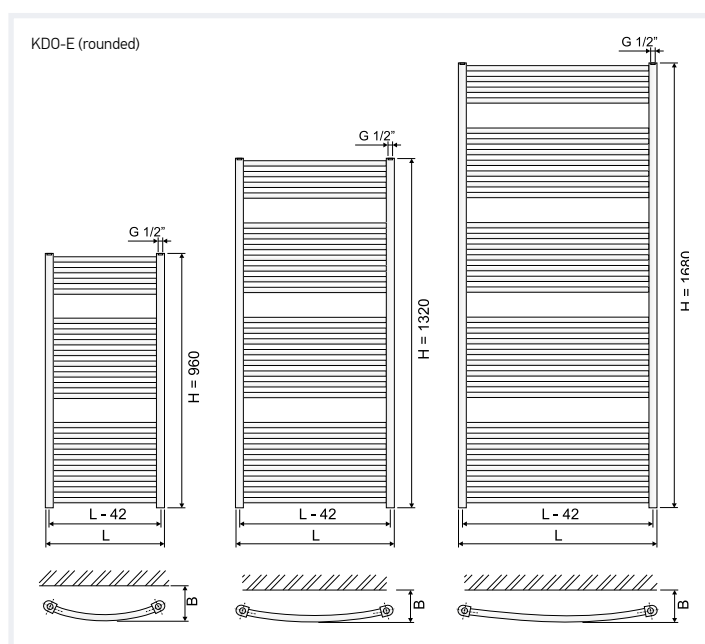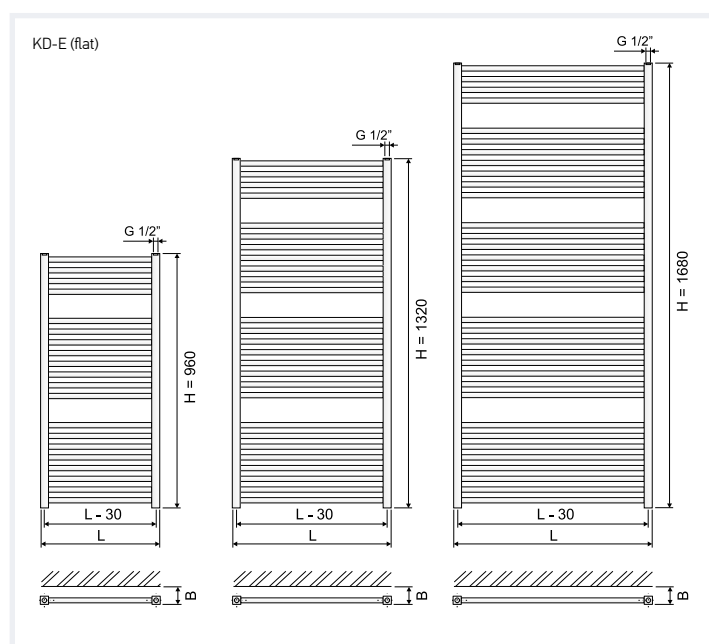


FENIX HOLDING



DEMISTA 
FLEXEL INTERNATIONAL 



FENIX DEUTSCHLAND 



KONSULENT TEAM 



FENIX POLSKA 




FENIX TRADING 



HEADQUARTERS
FENIX GROUP 



CEILHIT 



ACSO 



FENIX 



ELMARK 



FENIX SLOVENSKO 

EXPORT MARKETS

Armenia
Australia
Austria
Belgium
Belorussia
Bolivia
Bosnia and Herzegovina
Brazil
Bulgaria
Canada
Chile
Columbia
Croatia
Cyprus

Czech Republic
Denmark
Estonia
Finland
France
Georgia
Germany
Grand Duchy
of Luxemburg
Greece
Hong Kong
Hungary
Iceland
India

Iran
Ireland
Italy
Japan
Kazakhstan
Kenya
Kingdom of Jordan
Kingdom of
Saudi Arabia
Kyrgyz Republic
Latvia
Lebanon
Lithuania
Macedonia

Malta
Mexico
Montenegro
Netherlands
New Zealand
Norway
People's Republic of China
Peru
Poland
Portugal
Republic of Albania
Republic of Serbia
Republic of
South Africa

Republic of Tajikistan
Republic of Turkey
Republic of Uzbekistan
Romania
Russia
Singapore
Slovakia
Slovenia
South Korea
Spain
Sri Lanka
State of Israel
Sweden
Switzerland

Tunisian Republic
Turkmenistan
Ukraine
United Arab Emirates
United Kingdom
Uruguay
USA

CZECH REPUBLIC – 1990



REPUBLIC OF SERBIA – 2021



SLOVAK REPUBLIC – 1993



POLAND – 2019



UNITED KINGDOM – 2003



GERMANY – 2018



UNITED KINGDOM – 2008



CZECH REPUBLIC – 2016



FRANCE – 2010



NORWAY – 2014



SPAIN – 2010



FENIX TRADING s.r.o.

Slezská 2, 790 01 Jeseník, Czech Republic
Tel.: +420 584 495 302, Fax: +420 584 495 431
E-mail: fenix@fenixgroup.cz



www.fenixgroup.eu